

TOYO TIRES®

PROXES ST II™

HIGH PERFORMANCE STYLING FOR SUVs, SPORT TRUCKS, AND SELECT CROSSOVERS

The Proxes ST II is Toyo's newest high-performance radial created to meet the demands of plus-sized applications, by providing a smooth stable ride and a high, luxurious image.

Typical Vehicle Matches

Cadillac Escalade, EXT; Chevrolet Tahoe, Suburban, Silverado pickups; Dodge Durango, Nitro, Ram 1500; Ford Expedition, F-150 pickups; GMC Yukon; Infiniti Q7; Jeep Commander; Lexus LX 470, RX330; Mercedes-Benz ML320, ML430; Nissan Murano, Pathfinder, Titan. Toyota Land Cruiser, 4Runner, Tacoma X-Runner; Volvo XC70/XC90. OE fitments for: BMW X5; Infiniti FX35/FX45; Land Rover; Porsche Cayenne; VW Touareg.

500 MILE
or 45 DAY
TRIAL OFFER
AVAILABLE
LIMITED WARRANTY
SEE FOR DETAILS




UTQG

420 A A
Y-Rated sizes
280 A A

Customer Benefit	Product Features
Wet and Dry Performance	<ul style="list-style-type: none"> • Computer optimized, unidirectional, all-season tread design • Continuous center contact area with optimized water evacuation channels • Cap/base tread compound • V, W and Y speed-rated
All-Season Performance	<ul style="list-style-type: none"> • Computer-optimized, unidirectional, All-Season tread design • Cap/base tread compound • M&S rated
Steering Response	<ul style="list-style-type: none"> • Specially engineered polyester casing • High-ply turn-up construction • High bead filler • Two wide, high-tensile steel belts
Quiet, Stable Ride	<ul style="list-style-type: none"> • Toyo's "Silent Wall™" technology reduces pipe resonance for a quiet ride. • Five variable-pitch design distributed non-sequentially helps to reduce pattern noise. • Jointless bead wire • Jointless cap ply (construction may vary by size)
Durability and Tread Life	<ul style="list-style-type: none"> • Linear grooving on the tapered edge of the center blocks lowers pressure on the block edge for better wear and handling. • Multi-wave sipes in the shoulder block help minimize heel and toe wear • Rim protector
Appearance	<ul style="list-style-type: none"> • Stylish, unidirectional, All-Season tread with sporty design accents. • Computer optimized low profile design

Stylish, Unidirectional, All-season Tread Design

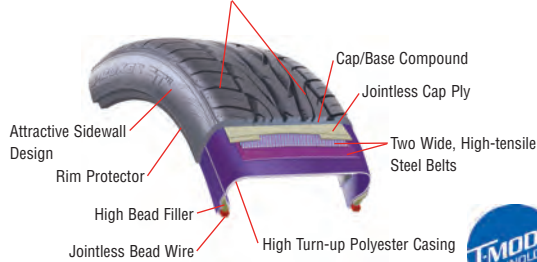

PROXES ST II™

HIGH PERFORMANCE STYLING FOR SUVs, SPORT TRUCKS, AND SELECT CROSSOVERS

PERFORMANCE

Tire Size	Product Code	Approved Rim Width Range (inch)	Tire Weight (lbs.)	Tread Depth (32")	Inflated Dimension		Static Loaded Radius (inch)	Max. Load (lbs.)	Max. Pressure (PSI)	Revs Per Mile	Price
					Overall Diameter (inch)	Overall Width (inch)					
235/65R17 104V	244030	6.5-7.0-8.5	30	11	29.0	9.3	13.2	1984	51	717	
255/60R17 110V XL	244060	7.0-7.5-9.0	34	11	29.0	10.1	13.2	2337	50	717	
275/60R17 110V	244040	7.5-8.0-9.5	37	11	29.9	10.8	13.5	2337	51	694	
285/60R17 114V	244050	8.0-8.5-10.0	39	11	30.4	11.4	13.7	2601	51	684	
225/55R17 97V	244070	6.0-7.0-8.0	28	11	26.7	9.1	12.3	1609	51	777	
275/55R17 109V	244080	7.5-8.5-9.5	35	11	28.9	10.9	13.1	2271	51	720	
255/60R18 112V XL	244090	7.0-7.5-9.0	36	11	30.0	9.9	13.7	2469	50	693	
285/60R18 116V	244100	8.0-8.5-10.0	40	11	31.3	11.3	14.2	2756	51	663	
255/55R18 109V XL	244110	7.0-8.0-9.0	34	11	29.0	10.2	13.3	2271	50	717	
255/50R18 106V XL	244130	7.0-8.0-9.0	33	11	28.1	10.2	11.9	2094	50	813	
255/45R18 99V	244150	8.0-8.5-9.5	29	10	27.0	9.8	12.5	1709	51	769	
295/45R18 108V	244160	9.5-10.0-11.0	34	11	28.3	11.4	13.0	2205	51	733	
255/55R19 111V XL	244170	7.0-8.0-9.0	36	11	30.0	10.3	13.8	2403	50	693	
255/50R19 103V	244180	7.0-8.0-9.0	34	11	29.1	10.2	13.4	1929	51	715	
275/45R19 108V XL*	244190	8.5-9.0-10.5	32	10	28.7	10.7	13.3	2205	50	724	
275/55R20 117V XL	244210	7.5-8.5-9.5	43	11	31.8	10.9	14.6	2833	50	653	
245/50R20 102V	244220	7.0-7.5-8.5	36	11	29.7	10.0	13.8	1874	51	698	
255/50R20 109V XL	244230	7.0-8.0-9.0	38	11	30.0	10.2	13.9	2271	50	692	
265/50R20 111V XL	244240	7.5-8.5-9.5	39	11	30.4	10.8	14.1	2403	50	683	
285/50R20 116V XL	244250	8.0-9.0-10.0	43	11	31.2	11.4	14.4	2756	50	665	
305/50R20 120V XL	244260	8.5-9.5-11.0	47	12	32.0	12.1	14.7	3086	50	649	
255/45R20 105V XL	244270	8.0-8.5-9.5	33	10	29.0	9.9	13.5	2039	50	716	
265/45R20 108V XL	244280	8.5-9.0-10.0	35	11	29.4	10.2	13.7	2205	50	707	
275/45R20 110V XL	244290	8.5-9.0-10.5	39	11	29.7	10.6	13.8	2337	50	700	
295/45R20 114V XL	244300	9.5-10.0-11.0	40	11	30.4	11.6	14.1	2601	50	683	
255/40R20 101V XL	244310	8.5-9.0-10.0	33	10	28.0	10.0	13.1	1819	50	741	
275/40R20 106W XL	244320	9.0-9.5-11.0	34	11	28.6	10.7	13.4	2094	50	725	
295/40R20 106V	244330	10.0-10.5-11.5	39	11	29.3	11.7	13.6	2094	51	710	
265/45R22 109V XL	244360	8.5-9.0-10.0	36	11	31.4	10.3	14.7	2271	50	661	
285/45R22 114V XL	244370	9.0-9.5-10.5	42	11	32.0	11.1	14.9	2601	50	648	
305/45R22 118V XL	244380	9.5-10.0-11.5	44	11	32.8	11.8	15.2	2910	50	634	
265/40R22 106V XL	244390	9.0-9.5-10.5	37	11	30.3	10.5	14.2	2094	50	686	
285/40R22 110V XL	244500	9.5-10.0-11.0	41	11	31.0	11.1	14.5	2337	50	669	
305/40R22 114V XL	244510	10.0-11.0-12.0	44	11	31.6	12.1	14.7	2601	50	657	
265/35R22 102W XL	244410	9.0-9.5-10.5	33	11	29.3	10.5	13.8	1874	50	709	
285/35R22 106W XL	244420	9.5-10.0-11.0	37	11	29.8	11.2	14.0	2094	50	698	
305/40R23 115V XL	244440	10.0-11.0-12.0	44	11	32.5	12.1	15.2	2679	50	639	
285/40R24 112V XL	244470	9.5-10.0-11.0	43	11	32.9	11.7	15.5	2469	50	631	
305/35R24 112V XL	244480	10.0-11.0-12.0	44	11	32.4	12.1	15.3	2469	50	640	
295/30R24 105V XL	244490	10.0-10.5-11.0	39	11	31.0	11.1	14.7	2039	50	670	
305/30R26 109V XL	244520	10.5-11.0-11.5	46	11	33.2	12.1	15.8	2271	50	625	

* UTQG rating is 280 A A, summer tires only, not M&S rated. XL = Extra Load. Rim protector on all sizes. Bold designates measuring rim width. When a V, W or Y appears in the service description, maximum speed capability is as follows: V= 149mph, W= 168mph, Y= 186mph. All Toyo brand tires are subject to continuous development. Toyo Tire U.S.A. Corp. reserves the right to change construction, materials or specifications without notice or obligation. Contact your Toyo dealer or Toyo Tires for current information. See Toyo Safety Advisory for Lifted Light Trucks, Page 48