

**DAYCO®**

www.dayco.com

**DAYCO®**

047393

# PRODUCTS GUIDE



# DAYCO® PRODUCTS CATALOG CONTENTS

Belt Drive Components.....	2-4
Timing Products.....	5-6
V-Belts.....	7
Industrial Belts.....	8-11
Snowmobile Belts.....	12
ATV Belts.....	13
Coolant Hose.....	14-21
Hose Clamps.....	22-23
Service Hose.....	24-32
Hydraulic Hose and Couplings.....	33-40
Crimping Equipment.....	41-42
Garage Exhaust Hose.....	43-45
Splash Protectors.....	46
Merchandisers, Stands, Racks, Cabinets and Kits.....	47-54
Belt and Hose Installation Tools.....	55-58
Notes.....	59

**The following are Registered Trademarks of Dayco Products, LLC**

Dayco®  
 Poly Cog®  
 Poly Rib®  
 Gold Label®  
 No Slack®  
 Top Cog®  
 GPL®  
 VX-Wedge®  
 V-Wedge®  
 Quick-Fit®  
 Insulone®  
 Factfinder®  
 aWEARness®

**The following are Registered Trademarks of Parker-Hannifin Corporation**

Blue Lightning®  
 E-Z Flex®  
 Thoro-Flo®

**The following is a Registered Trademark of E.I. DuPont DeNemours and Company**

Teflon®

**The following are Registered Trademarks of Ford Motor Company**

Ford®  
 Mustang®

# DAYCO® BELT DRIVE COMPONENTS

## Dayco® W Profile Poly Rib® Belt

Designed for high mileage multiple-accessory drives



Dayco's "W" profile belt (patent pending) is the most innovative advancement in multi-rib belt design in over 25 years. Developed through extensive laboratory and actual road mileage testing, this unique rib profile has been specifically Dayco engineered to conform to high mileage, worn or misaligned drives without a sacrifice in quiet, long-lasting performance.

Constructed with Aramid reinforced EPDM compounds, the Dayco "W" profile belt delivers more than OE required quality...it delivers the solution to troublesome drive problems. Dayco Poly-Rib Belts meet or exceed SAE J1459 and SAE J1596 specifications.

## Dayco® Gold Label® Poly Rib® Belt

Designed for diesel engine drive accessory drives



This "diesel engine grade" belt features more polyester cords per inch than Dayco's conventional Poly Rib Belt, to meet the higher torque and power pulses exerted by today's diesel engines. These specially treated cords resist stretching and ensure the length stability essential for correct tensioning between drive system components. The serpentine belt's heavy-duty construction provides additional integrity without sacrificing flexibility or belt-to-pulley compatibility. In addition, the Dayco Gold Label Poly Rib Belt's high-grade engineered EPDM construction is specifically compounded to resist the heat and harsh underhood environments experienced in over-the-road and off-road conditions. This belt meets or exceeds SAE J1459 and SAE J1596 specifications.

## Dayco® ela® Serpentine Belt

Designed for direct replacement on accessory drives requiring a "Stretch" type belt.



The ELA or "Stretch" belts are specifically designed for 2 to 4 point drives that do not require tensioning. Although these belts may look like standard poly rib belts, they are very different. These specially designed belts have self-tensioning capabilities required by specific OE drives designed for a "Stretch" belt. Vehicles that are manufactured with "Stretch" belts MUST replace them with "Stretch" belts. These belts are NOT interchangeable with standard constructed belts of the same size.

Dayco ELA belts utilize a proprietary EPDM construction that is designed to elongate over the fixed pulley system, and then maintain the required belt tension over the life of the belt. The backbone behind the Dayco ELA belt is its specially developed polyamide tensile member, which allows for high elongation required for installation, yet provides the proper tension maintenance properties to transmit the accessory loads demanded for the drive.

This belt construction incorporates a wear resistant EPDM rib material, along with a highly elastic EPDM cushion rubber that surrounds the polyamide tensile cord, thus providing the required adhesion and flexibility to maintain lasting performance.

"Stretch" belts have unique installation instructions depending on the OE application. Installation may require a specialized tool for the application or a simple zip tie. DO NOT attempt to install by prying the belt on the pulleys. Dayco provides detailed instructions on the reverse side of the sleeve.

## Dayco® Double Sided Poly Rib® Serpentine Belt

Designed for multiple accessory drives requiring the transmission of power from both sides of the belt

Another first... was Dayco's introduction of the double sided serpentine belt to the automotive aftermarket. The Dayco Double Sided Poly Rib Serpentine Belt is manufactured from an extreme temperature EPDM and features a construction that uses a highly fiber loaded compound on both sides of the belt to maximize load carrying requirements while minimizing pulley misalignment noise. In addition, the processes utilized in the production of this belt employs advanced manufacturing techniques allowing the overall belt thickness to be minimized... ultimately resulting in a cooler running belt.



## Dayco® LGT® Serpentine Belt

Designed for application specific multiple accessory drives requiring aggressive back side construction

Linear Grooved Technology (LGT) Belts are designed for specific applications that require the backside of the belt to run aggressive accessories. Once again Dayco is meeting the demands of all vehicles with application specific belt constructions. As with all Dayco Poly Rib belts, LGT belts are constructed with EPDM compounds for extended life.



## Dayco® **NoSlack**® Automatic Belt Tensioner

Designed to maintain constant tension on serpentine belt drives

Serpentine belt drives consist of a single belt that powers most, if not all, of the engine's accessories. To maintain the proper tension throughout the drive, an automatic, spring-loaded tensioner is incorporated into the accessory belt drive geometry. Dayco's No Slack Automatic Belt Tensioner features multiple patented components that are engineered to provide less variation in overall belt span tension. The properly engineered torque output from the tensioner, ensures correct belt tension to prolong the life of accessory bearings. It also minimizes the risk of belt squeal and slippage, or poor accessory performance caused by low tension after the belt begins to wear. A high abrasion resistant strip is wound within the spring to reduce wear, friction and energy consumption. The spring itself is coated with rust resistant organic resins.




Other superior design features include a steel locator pin (where the application demands). A heavy-duty cast aluminum springcase resists cracking and fatigue. The heavy-duty cast aluminum arm offers additional strength and less distortion during operation. A patented retaining technology which locks the springcase and arm together and seal against corrosion. A steel pivot tube (where the application demands) provides additional strength for critical torque requirements. A thermoplastic rubber "spring slot plug" reduces harmful contaminants to the assembly. The lubricated nylon "pivot tube bushing" and "spring bushing" promote quieter performance. The zinc coated pulley mounting bolt resists rust. In order to meet OEM performance standards, Dayco No Slack Automatic Tensioners come with either a glass-filled polymer (plastic) or steel pulley, that features a lifetime lubricated bearing and dust cover to protect against contaminants.

# DAYCO® BELT DRIVE COMPONENTS

## Dayco® Gold Label® Heavy Duty Automatic Belt Tensioner

Designed for heavy duty diesel engine accessory drive applications

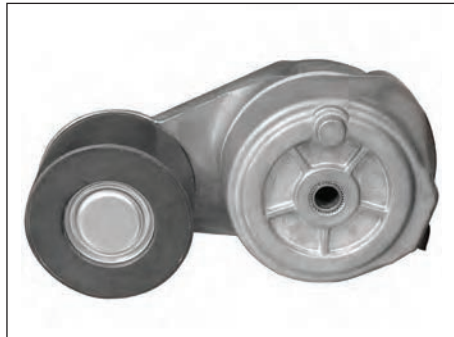

As the major supplier to heavy duty original equipment manufacturers, Dayco's Gold Label Heavy Duty Tensioners are guaranteed to be engineered and manufactured to the strictest design specifications. The heavy-duty cast aluminum body and pulley arm translates into extra strength and durability. Dayco's Gold Label Heavy Duty Tensioners features multiple patented components that are engineered to handle the higher torque and power pulses exerted by today's diesel engines. Rugged pulleys with multiple lifetime lubricated bearings deliver long lasting, dependable service. In addition, virtually all Dayco Gold Label Heavy Duty Tensioners feature patented dampened designs using a molded steel plate, which acts like a "radial shock absorber" for the tensioner arm and reduces contamination.

## Dayco® **NoSlack**® Idler/Tensioner Pulley

Designed to replace serpentine and v-belt drive idler and tensioner pulleys



Dayco's reputation for top performance idler and tensioner pulleys is the result of the advanced automotive technologies employed in the materials research, design engineering, and manufacture of our pulleys. Specially formulated glass-filled polymers insure a high strength, cooler running, wear resistant "plastic" pulley. The use of state-of-the-art 3-D computer aided design (CAD) and finite element analysis (FEA) guarantees the optimal design and maximum structural integrity for both plastic and steel pulleys. The manufacture of pulleys with smoother surfaces and tighter dimensional tolerances translates into less vibration and therefore longer belt life. Lifetime lubricated ball bearings and double high temperature seals assure peak bearing performance, the most critical element of a pulley's service life.

## Dayco® Gold Label® Heavy Duty Idler/Tensioner Pulley

Designed to replace idler and tensioner pulleys for serpentine drives in heavy duty diesel engine applications



The performance demands of original equipment manufacturers of over-the-road trucking and off-road equipment requires a "built for punishment" heavy duty construction. That's why they specify Dayco. Dayco Gold Label Heavy Duty Pulleys are manufactured from steel, powdered metal, and engineered polymer materials to afford wear resistance under harsh environments and feature double pressed-in bearings and retainer to provide long life despite the shock loads experienced in diesel engine applications.

## Dayco® Timing Belt

The Dayco Timing Belt replaces the Dayco Synchro-Cog® Timing Belt

Designed for OHC and DOHC type engines

Dayco is recognized by the automotive industry as a world leader in the manufacture of timing belts. Dayco's patented, self-lubricating fabric provides exceptional resistance to abrasion, resulting in extended pulley and belt life. The molded cog design runs quieter and is more economical than chain drives. Our premium, high modulus glass fiber non-stretch cord delivers precise length stability to keep the engine running smoothly over the life of the belt. The belt's compounding and tooth configurations are designed for specific applications ranging from normal service to high performance, high temperature engines, where HSN compound is used. The part number includes three final digits that conform to industry standard numbering. Dayco Timing Belts meet all OEM performance specifications.




Manufactured with tough wear resistant fabric, high tensile strength cord and molded cog surface, the Dayco Timing Belt provides consistent slip proof power transfer and high resistance to oil and engine heat.

95014  
95 Dayco Timing Belt  
014 Industry Standard Number

## Dayco® Hydraulic Timing Belt Actuator

Designed to absorb changes in loss of timing belt tension.

A loss in timing belt tension may be caused by variations in engine temperatures, speed or the general wear and aging of the belt. The Dayco Hydraulic Timing Belt Actuator maintains constant tension on the timing belt during crankshaft revolution. This maintaining of tension at a constant level reduces noise, prevents belt flapping and ensures proper transmission efficiency throughout the entire service life of the belt.

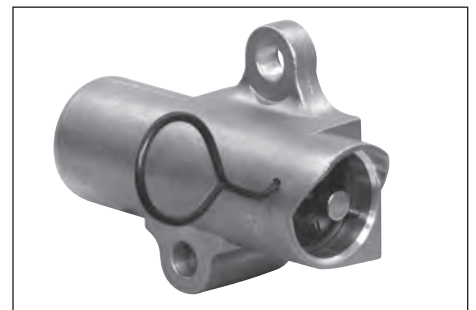

# DAYCO® TIMING PRODUCTS

## Dayco® Timing Component Kits

Designed for replacement of worn or damaged OEM timing belt tensioners and idler pulleys



Dayco Timing Belt Component Kits include pre-packaged tensioners, idler pulleys and instructions, each matched to a specific make, model and year of vehicle to assure replacement part accuracy and time saving convenience. Dayco Timing Belt Component Kit tensioners and idler pulleys are manufactured to meet the critical OE quality, fit, form and function requirements demanded by both domestic and imported vehicle manufacturers to ensure long lasting peak performance. Dayco Timing Belt Component Kits eliminate the need to pay high automotive dealership tensioner and idler pulley prices, the time consuming “pick-up” travel time to and from the automotive dealership and the frustration experienced from lack of the automotive dealership replacement tensioner and idler pulley inventory. Dayco Timing Belt Component Kits are in stock and readily available through all Dayco aftermarket channels of distribution

guaranteeing speedy “on-time” delivery.

## Dayco® Timing Belt Kits

Designed for replacement of worn or damaged OEM timing belts



Dayco Timing Belt Kits include belts, tensioners and idler/pulleys. Dayco offers one of the most complete line of timing belt kits in the market. All kit components and belts are manufactured to the critical OE quality, fit, form and function requirements demanded by both domestic and foreign name plate vehicles. Also included are trilingual installation instructions and an extended warranty.

## Dayco® Timing Belt Waterpump Kits

Designed for replacement of worn or damaged OEM timing belts, tensioners, waterpumps and idler pulleys



Dayco offers the most complete line of timing belt kits in the market. Designed for replacement of worn or damaged timing belts, tensioners, idler/pulleys, hydraulic actuators and water pumps. These timing belt water pump kits are a convenient solution when replacing all the major components in a timing belt job. All parts included are engineered to meet the critical OE quality, fit, form and function requirements demanded by both domestic and imported vehicles. Also included are trilingual installation instructions and an extended warranty.

## Dayco® Top Cog® V-Belt

Designed for power transmission to vehicle accessory

Back in the early days of the fledgling automotive industry, Dayco was the first to develop the raw edge sidewall construction, which facilitates controlled slippage around pulleys. Raw edge construction is combined with Dayco's patented cogged top design to ensure the top performance that today's vehicles and drivers demand. The Dayco Top Cog V-Belt delivers more flexibility and increases airflow around the belt, so it runs cooler and lasts longer than most competitive belts. Three plies of neoprene impregnated fabric resist heat, oil, and grease, and a specially formulated treatment of the polyester cord provides the strength, stability, and reliability that are required of a "national brand" v-belt. Dayco Top Cog V-Belts meet or exceed SAE J636 and J637 specifications.



Dayco Top Cog Belt's Raw Edge sidewall construction, patented cogged top design, three-ply fabric and specially formulated polyester cord delivers more flexibility, runs cooler and lasts longer than competitive belts.

15445  
 15 15/32" Nominal Top Width  
 445 44.5" Effective Length

## Dayco® Gold Label® Top Cog® Belt

With Laminated Construction

Designed to deliver extended life in demanding diesel applications

Dayco's Gold Label Top Cog Belt is the workhorse of the heavy-duty industry. The cogs in the top of the belt deliver increased flexibility around small pulleys, and the increased surface area results in a cooler running belt. Polyester cord provides maximum power transfer and tension holding capability for the life of the belt. The laminated construction helps absorb greater shock loads associated with diesel engines. These Dayco Gold Label Top Cog advantages translate into less downtime, lower maintenance costs, and increased dependability. Dayco's Top Cog Gold Label Belt meets or exceeds SAE J636 and J637 specifications.




## Dayco® Gold Label® Top Cog® Belt

With Bottom Cog Construction

Designed for heavy duty applications requiring smaller diameter pulleys

Dayco combined the outstanding performance characteristics of the Dayco Gold Label Top Cog Belt with the increased flexibility obtained through bottom-cog technology to make the most flexible heavy duty v-belt available. The raw edge construction maintains constant grip to eliminate slip and deliver maximum power on smaller diameter pulleys. The combination of top and bottom cogs offers extreme flexibility around smaller diameter pulleys for longer life. Polyester cord provides maximum tension-holding capability for the life of the belt. Dayco's Gold Label Top Cog Belt meets or exceeds SAE J636 and J637 specifications.





# DAYCO® INDUSTRIAL BELTS

## Dayco® Banded V-Belt

Designed for OE multiple groove pulleys



Dayco Banded V-Belts are specifically designed for applications where original equipment pulley drive design requires the use of two v-belts joined together by a tie band. The belt's Raw Edge® construction, 3-ply laminated fabric and neoprene compounding ensures superior gripping power while the bottom cog construction provides extreme flexibility and cooling.


By combining two belts utilizing the tie-band process, the Dayco Banded V-Belt greatly reduces the tendency for single belts, when subjected to fluctuating load tensions to come off or turn over in multiple belt pulley drives.

2B17510

2 Number of Bands  
 B Banded Belt  
 17 17/32" Top Width of Each Band Rib  
 510 51.0" Effective Length

## Dayco® GPL® Premium Utility V-Belt

Designed for heavy duty use on lawn & grounds, home, farm, shop or industrial applications



Dayco GPL Premium Utility V-Belts operate efficiently even when subjected to temperature extremes, high humidity, moisture, grit, oil and grease. Aramid fiber cord protects against shock loading and stabilizes belt length. The specifically engineered cover, which closely resembles OEM type belts, delivers optimum controlled clutching for maximum power transfer while the cover's distinctive black and white (salt and pepper) pattern allows for easy product identification.

The Dayco GPL Premium Utility Belt is recommended for heavy duty lawn and garden equipment... especially where superior load carrying capacity, extra heavy clutching and reverse bend characteristics are required.

L350

L Dayco GPL Premium Utility Belt  
 3 3/8" Top Width  
 50 50.0" Outside Circumference

L455

L Dayco GPL Premium Utility Belt  
 4 4/8" or 1/2" Top Width  
 55 55.0" Outside Circumference

L555

L Dayco GPL Premium Utility Belt  
 5 5/8" Top Width  
 55 55.0" Outside Circumference

## Dayco® FHP Utility V-Belt

The Dayco FHP Utility V-Belt replaces the Dayco Durapower® II Utility V-Belt

Designed for use on lawn & grounds, home, farm or shop applications

Featuring a rubber impregnated wrapped fabric cover, high modulus polyester cord and specially formulated belt core, the Dayco FHP Utility Belt offers superior performance. Designed for use with fractional horsepower motors utilizing small diameter pulleys, this Dayco FHP Utility Belt delivers extreme flexibility and a smooth, quiet operation over a multitude of fractional horsepower drive applications. **Note: Not for use on clutching drives.**

The Dayco FHP Utility V-Belt's Raw Edge side-wall construction and lower cord placement makes it an ideal belt for all non-clutching, light duty, lower horsepower applications.



	3L350		4L410		5L550
3	3/8" Top Width	4	4/8" or 1/2" Top Width	5	5/8" Top Width
L	Light Duty (FHP)	L	Light Duty (FHP)	L	Light Duty (FHP)
350	35.0" Outside Circumference	410	41.0" Outside Circumference	550	55.0" Outside Circumference

## Dayco® Gold Label® Industrial V-Belt

The Dayco Gold Label Industrial V-Belt replaces the Dayco Super Blue Ribbon® V-Belt

Designed for use in applications with higher horsepower and shock loads

Dayco is the industry leader in wrapped molded belts. This belt, constructed with a double fabric cover, handles the most demanding industrial applications ranging from 1 to 1,000 horsepower and up to 8,000 RPM. The double fabric cover offers extreme flexibility enabling it to run on the smaller pulleys. In addition, the construction of the cover fabric also provides excellent resistance to oil, heat and weather. The Dayco Gold Label Industrial V-Belt is the ideal choice for reliable performance on an extremely wide range of applications.

The Dayco Gold Label Industrial V-Belt delivers reliable performance over an extremely wide range of horsepower and RPM applications. Its double fabric cover provides the flexibility needed for running on small pulleys while providing resistance to oil, heat, weather and aggressive environmental conditions.



	AP35		B 21/32" Top Width		P Dayco Gold Label Industrial V-Belt
A	1/2" Top Width	P	Dayco Gold Label Industrial V-Belt	60	63.0" Outside Circumference
P	Dayco Gold Label Industrial V-Belt	55	58.0" Outside Circumference		
35	37.0" Outside Circumference				
			CP60		
	BP55		C 7/8" Top Width		

# DAYCO® INDUSTRIAL BELTS

## Dayco® Premium Industrial V-Belt

The Dayco Premium Industrial V-Belt replaces the Dayco Gold Label® Cog-Belt®

Designed for applications requiring increased horsepower capacity and/or higher speeds



The Dayco Premium Industrial V-Belt's unique construction, which combines the superior flexing of precision molded cogs with the tenacious gripping power of raw edge sidewalls, provides significantly longer belt life without jeopardizing increased horse-power capacity and/or higher speeds on industrial type drives.

The Energy Saver! The Dayco Premium Industrial V-Belt is more energy-efficient because it is more flexible. This Dayco belt offers the highest horse-power rating for longer service while its Raw Edge design resists slippage even at low drive tensions.

AX35		BX55		CX96	
A	1/2" Top Width	B	21/32" Top Width	C	7/8" Top Width
X	Dayco Premium Industrial V-Belt	X	Dayco Premium Industrial V-Belt	X	Dayco Premium Industrial V-Belt
35	37.0" Outside Circumference	55	58.0" Outside Circumference	96	100.0" Outside Circumference

## Dayco® Gold Label® VX-Wedge® Belt

Designed for applications requiring increased horse-power capacity and/or higher speeds



Dayco's Gold Label VX-Wedge Belt features a unique construction consisting of extremely flexible precision molded cogs, raw edge sidewalls for tenacious gripping power and high grade engineered polymer compounding for resistance to oil and heat. The Dayco Gold Label VX-Wedge Belt provides significantly longer belt life without jeopardizing increased horsepower capacity and/or higher speed drives.

3VX390		5VX530	
3	3/8" Top Width	5	5/8" Top Width
VX	Dayco Gold Label VX-Wedge Belt	VX	Dayco Gold Label VX-Wedge Belt
390	39.0" Outside Circumference	530	53.0" Outside Circumference

## Dayco® Gold Label® V-Wedge® Belt

Designed for smaller more compact drives



The Dayco Gold Label V-Wedge Belt offers, in addition to oil and heat resistance, excellent flexibility and static dissipation. This wrapped belt's narrower, deeper wedge configuration allows for more efficient load carrying and higher horse-power capabilities for smaller, more compact drives.

3V375		5V750		8V1060	
3	3/8" Top Width	5	5/8" Top Width	8	1" Top Width
V	Dayco Gold Label V-Wedge Belt	V	Dayco Gold Label V-Wedge Belt	V	Dayco Gold Label V-Wedge Belt
375	37.5" Outside Circumference	750	75.0" Outside Circumference	1060	106.0" Outside Circumference

## Dayco® Double Angle V-Belt

Designed for serpentine and reversing drives


The Dayco Double Angle V-Belt transmits power from either side of the belt. Polyester cords and a durable cotton/polyester cover delivers maximum strength and length stability while ensuring resistance to heat, ozone, grease, oil and dirt. Specially formulated core compounding provides for long life and high horsepower capabilities. This belt flexes equally well in either direction and provides natural wedging action on both sides for maximum power.



## Dayco® Gold Label® Industrial Banded Belt

Designed for high horsepower and shock load applications

The Dayco Gold Label Industrial Banded Belt features the same wrapped molded construction and the same oil and heat resistant characteristics as Dayco's Gold Label Industrial V-Belt plus the addition of a fabric-rubber top band for multiple belt stability. These banded belts are primarily employed on applications where single or multiple belts, when subjected to fluctuating load tensions and high horsepower, have the tendency to vibrate, turn over or come out of the pulleys.



## Dayco® Gold Label® V-Wedge® Banded Belt

Designed for high horsepower applications

Dayco's Gold Label V-Wedge Banded Belt features a fabric rubber top band for multiple belt stability. The belt's wrapped cover engineered with a narrower, deeper wedge configuration and polyester cord, eliminates belt whip and turnover permitting the drive to tolerate peak shock loads more effectively.



# DAYCO® SNOWMOBILE BELTS

## Dayco® XTX (Extreme Torque) Snowmobile Belt

Designed for use on the most extreme horsepower snowmobiles



Dayco's revolutionary XTX high horsepower drive belt. Bred from a rich history of experienced belt builders, the new XTX is specifically engineered to maximize the performance of high horsepower snowmobiles. Beating the competition on the CSRA race course is just one of many aspects that set the XTX belt apart from its competition. Specially formulated high temperature Polymer along with the highest level of engineered reinforcement proves to perform better in belt operating temperature and efficiency than leading competitors. Its innovative break-through design of deeper cogs on top and rounded cogs on the bottom yield the advantages of ultimate flexibility and longer belt life.

The Dayco XTX belt offers:

- Faster and more consistent throttle response at high speeds
- Quicker throttle response at mid-speed acceleration
- Greater secondary acceleration at high RPMs
- Greater secondary acceleration as primary acceleration increases
- Reduction in slippage during the highest levels of torque
- Providing more power to track
- Better performance during deceleration (more responsive engine braking)
- Tested and proven reliability at well over 12,000 RPMs
- A cooler-running temperature than the leading competitors
- Confidence in knowing you're covered with a one year warranty

## Dayco® HPX (High Performance Extreme) Snowmobile Belt

Designed for use on high horsepower snowmobiles



Featuring Dayco's Top Cog® design for increased flexibility and longer belt life, this high horsepower belt is constructed with oversized p-aramid cords and CVT rubber compounding to deliver the increased strength and durability that's required to stand up to today's higher snowmobile engine RPMs and operating temperatures. Enjoy the exhilaration that comes from knowing that when you need to "clutch down" the Dayco HPX Snowmobile Belt will deliver a full range of power to attack any terrain without a loss of horsepower.

## Dayco® HP (High Performance) Snowmobile Belt

Designed for use on low to mid-range horsepower snowmobiles



Manufactured from aramid reinforced polychloroprene rubber compound and p-aramid cord to ensure superior strength, long lasting dimensional integrity and longer belt life, this snowmobile belt ensures the dependable, smooth performance that you and your family prefer for leisurely, carefree days of trail riding.

## Dayco® XTX (Extreme Torque) ATV Belt

Designed for use on the most extreme horsepower ATVs

Dayco's revolutionary ATV belts are engineered for those monster machines powered by 800cc and above engines. Specially-formulated high temperature Neoprene® with the highest level of Aramid fiber loading available delivers track-churning performance for the most aggressive riders. This innovative break-through design features deeper cogs on top and rounded cogs on the bottom for ultimate flexibility and longer belt life.

The Dayco XTX belt offers:

- Faster and more consistent throttle response at high speeds
- Quicker throttle response at mid-speed acceleration
- Greater secondary acceleration at high RPMs
- Reduction in slippage during the highest levels of torque
- Increased horsepower capacity
- Better performance during deceleration (more responsive engine braking)
- Tested and proven reliable at well over 12,000 RPMs
- Cooler running than the leading competitors

This race-tested Dayco XTX belt gives extreme riders the best out-of-the-hole acceleration, throttle response and durability, for the ride of a lifetime - every time!



## Dayco® HPX (High Performance Extreme) ATV Belt

Designed to dominate any type of terrain

From mud hole to rocky trails to hill climbs to desert treks Dayco HPX ATV Belts deliver unparalleled response. Constructed with extra strong p-aramid cord reinforcement and engineered fiber loaded neoprene compounding this belt delivers the "muscle" and durability demanded by today's high performance engines and high performance enthusiasts. Tested under severe field conditions the Dayco HPX ATV Belt has been proven to run cooler and to provide longer belt life than competitive belts.



## Dayco® HP (High Performance) ATV Belt

Designed for use on allterrain vehicles, golf carts and farm and ranch utility vehicles

Proven under grueling actual all-terrain test conditions, the Dayco HP Outdoor Activity Belt has fast become the ATVer's "Belt of Choice". Manufactured from a specially formulated aramid reinforced polychloroprene and p-aramid cord, the Dayco HP Outdoor Activity Belt delivers superior strength, enhanced dimensional integrity and stability for long lasting belt life. Dayco HP ATV Belts...**Built to get you there and back!**



## Dayco® Molded Radiator and By-Pass Hose

Designed to replace OEM hose



Dayco Molded Radiator and By-Pass Hose with knitted reinforcement and all synthetic EPDM construction provides the high strength and resistance to oil, mud, salt, road debris, ozone, coolants, and temperature variations of -40°F (-40°C) to +257°F (+125°C) that are required for OEM hose replacements. The inner base tube is reinforced with knitted rayon for maximum strength and burst resistance for the life of the hose. Dayco's Molded Radiator and By-Pass Hose has a convenient plastic hang strap for quick and easy merchandising. In addition to meeting SAE J20R4, Class D-1 requirements, this hose is now designed to meet Type EC electro-chemical requirements as specified in SAE J1684. For pressure rating see chart on page A20.

## Dayco® Branched Radiator Hose

Designed to replace OEM hose



Dayco's Branched Radiator Hose is an ideal aftermarket replacement for OEM branched hose. Its all EPDM construction resists the effects of oil, mud, salt and ozone, while its knitted rayon reinforced inner tube offers resistance to temperature ranges of -40°F (-40°C) to +257°F (+125°C). Leak proof junctions ensure long service life and unrestricted flow. This hose meets SAE J20R4, Class D-1, Type EC electro-chemical requirements as specified in SAE J1684. Dayco's Branched Radiator Hose has a convenient plastic hang strap for quick and easy hang-up. For pressure rating see chart on page A20.

## Dayco® Small I.D. Molded Heater Hose

Designed to replace OEM small I.D. hose applications



Dayco's Small I.D. Molded Heater Hose is designed to replace OEM coolant hose in applications where molded hose in small diameters (1" I.D. or smaller) is required. The molded configuration eliminates the need for multiple connections of hoses and clamps when added to Dayco's line of molded heater hose and assemblies. The knitted reinforcement and synthetic EPDM construction provides high strength and resistance to detrimental environmental elements, coolants, and temperature variations of -40°F (-40°C) to +257°F (+125°C). The line provides 98% coverage. In addition to meeting SAE J20R4, Class D-1 requirements, this hose is designed to meet Type EC electro-chemical requirements as specified in SAE J1684. If the OE parts have a "quick connect" end, Dayco's Small I.D. Molded Heater Hoses are


also made with the quick connect assembled onto the hose for fast, convenient installation. These hoses include a convenient plastic hang strap for easy inventory storage. For pressure rating see chart on page A20.

## Dayco® 90° Molded Coolant Hose

Designed for vehicles that require special heater hoses with molded 90° elbow to fit the engine compartment configuration

Dayco's 90° Molded Coolant Hose's knitted reinforcement and synthetic EPDM construction provides high strength and resistance to detrimental environmental elements, coolants, and temperature variations of -40°F (-40°C) to +257°F (+125°C). In addition to meeting SAE J20R3, Class D-1 requirements, this hose is now designed to meet Type EC electro-chemical requirements as specified in SAE J1684. This hose can be used to replace heater hose and other coolant hoses where a 90° elbow is required. This hose can also be used with Dayco's Heater Hose Connectors to make a variety of routing configurations. Dayco's 90° Molded Coolant Hose has a convenient plastic hang strap to simplify inventory management. For pressure rating see chart on page A20.

Part No.	I.D. x Length	Part No.	I.D. x Length
80393	1/2" x 4" x 90° x 6"	80406	5/8" x 4" x 90° x 48"
80394	1/2" x 4" x 90° x 12"	80407	5/8" x 4" x 90° x 60"
80395	1/2" x 4" x 90° x 18"	80408	5/8" x 4" x 90° x 69"
80396	1/2" x 8" x 90° x 18"	80409	5/8" x 4" x 90° x 62"
80397	1/2" x 8" x 90° x 24"	80411	3/4" x 4" x 90° x 6"
80398	1/2" x 4" x 90° x 36"	80412	3/4" x 4" x 90° x 12"
80400	5/8" x 4" x 90° x 6"	80413	3/4" x 4" x 90° x 18"
80401	5/8" x 4" x 90° x 12"	80414	3/4" x 4" x 90° x 24"
80402	5/8" x 4" x 90° x 18"	80415	3/4" x 8" x 90° x 24"
80403	5/8" x 8" x 90° x 18"	80416	3/4" x 4" x 90° x 36"
80404	5/8" x 4" x 90° x 24"	80417	3/4" x 4" x 90° x 48"
80405	5/8" x 4" x 90° x 36"	80418	3/4" x 4" x 90° x 60"

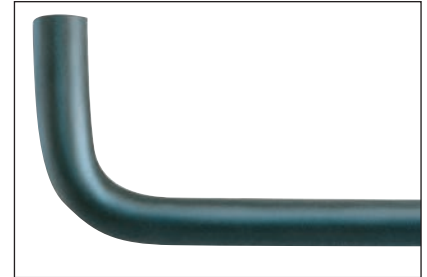

## Dayco® Plastic Heater Hose Connectors

Designed for use in making various replacement heater hose configurations

Dayco's Heater Hose Connectors accommodate 1/4", 3/8", 1/2", 5/8" and 3/4" hose I.D.s and feature a unique barbed end profile to insure a leak-proof seal. These glass filled nylon connectors are compatible with all traditional coolants and fuels. Dayco Hose Connectors are available in straight, "Y", elbow, tee and reducing configurations. A circumferential flange provides a hose stop that assures the hose is inserted to the proper depth. Anti-rotation ribs are molded into the connectors to prevent hose rotation or twisting. The connectors are packaged and sold in poly bags, five per package.

Part No.	Size	Style	Part No.	Size	Style
80650	1/4"	Straight	80671	3/8"	Elbow
80651	3/8"	Straight	80672	1/2"	Elbow
80652	1/2"	Straight	80673	5/8"	Elbow
80653	5/8"	Straight	80674	3/4"	Elbow
80654	3/4"	Straight	80680	1/4"	Tee
80660	1/2" > 3/8"	Reducer	80681	3/8"	Tee
80661	5/8" > 1/2"	Reducer	80682	1/2"	Tee
80662	3/4" > 5/8"	Reducer	80683	5/8"	Tee
80670	1/4"	Elbow	80684	3/4"	Tee





# DAYCO® COOLANT HOSE

## Dayco® Flex Radiator Hose

Designed to replace molded curved radiator hose when routing allows



Precision molded in standard lengths, Dayco's Flex Radiator Hose is designed to replace straight or molded radiator hoses. The knitted reinforcement and synthetic EPDM construction meets SAE J20R4, Class D-2 requirements, preventing splitting, ballooning, and elongation, and resisting ozone and other detrimental environmental elements, coolants, and temperature variations of -40°F (-40°C) to +257°F (+125°C). The corrugations, combined with the inserted helical steel coil spring, provide excellent hose flexibility without flattening or collapse. Dayco's Flex Radiator Hose has a convenient plastic hang strap attached for quick and easy merchandising. **Note: NOT suitable for fuel or oil transfer.** For pressure rating see chart on page A20.

Part No.	Size
81011	1 1/4" x 7 3/8"
81021	1 1/4" x 9 5/8"
81031	1 1/4" x 11"
81041	1 1/4" x 14 3/4"
81051	1 1/4" x 17 1/4"
81061	1 1/4" x 20"
81071	1 1/4" x 23"
81081	1 1/4" - 1 1/2" x 15 1/2"
81091	1 1/4" - 1 1/2" x 19 1/2"
81101	1 1/2" x 5 3/4"
81111	1 1/2" x 7 5/8"
81121	1 1/2" x 9"
81131	1 1/2" x 10 3/4"
81141	1 1/2" x 12 1/4"
81151	1 1/2" x 13 7/8"
81161	1 1/2" x 15 3/4"
81171	1 1/2" x 17 1/4"
81181	1 1/2" x 19 7/8"
81191	1 1/2" x 22"
81201	1 1/2" x 25"
81211	1 1/2" x 27 1/2"
81221	1 1/2" x 30"
81231	1 1/2" - 1 3/4" x 13 1/4"

Part No	Size
81241	1 1/2" - 1 3/4" x 15"
81251	1 1/2" - 1 3/4" x 16 1/2"
81261	1 1/2" - 1 3/4" x 19 1/2"
81271	1 1/2" - 1 3/4" x 22"
81281	1 3/4" x 6 1/8"
81291	1 3/4" x 8 5/8"
81301	1 3/4" x 10"
81311	1 3/4" x 11 1/4"
81321	1 3/4" x 13 1/4"
81331	1 3/4" x 16 1/2"
81341	1 3/4" x 18 3/4"
81351	1 3/4" x 23 1/2"
81361	1 3/4" - 2" x 12 1/4"
81371	1 3/4" - 2" x 14 1/8"
81381	1 3/4" - 2" x 16 1/2"
81391	1 3/4" - 2" x 19"
81401	2" x 9 1/2"
81411	2" x 12 1/4"
81421	2" x 14 1/8"
81431	2" x 16 13/16"
81441	2" x 18"
* 81490	1 1/2" x 16 7/8"
* 81491	1 1/2" x 22 7/8"
* 81492	1 1/2" x 20 1/2"

\* 90° Bend on one end

## Dayco® Gold Label® Heavy Duty Flex Radiator Hose

Designed to replace molded curved radiator hose when routing allows

Dayco's Gold Label Heavy Duty Flex Radiator Hose is hand-built with neoprene and heavy duty fabric and wire reinforcement for high burst strength and collapse resistance. The ribbing provides excellent flexibility and kink resistance. This heavy duty construction stands up to the effects of ozone and other detrimental environmental elements, coolants, coolant additives, and temperature variations of -40°F (-40°C) to +212°F (+100°C). The hose's construction meets or exceeds SAE J20R5, Class C requirements for heavy duty applications. **Note: NOT suitable for fuel or oil transfer.** For pressure rating see chart on page A20.



Part No.	Size
82008GL	1 3/4" x 18 3/4"
82010GL	1 3/4" x 23 1/2"
82011GL	1 3/4" x 13 1/4"
82021GL	1 3/4" x 16 1/2"
82031GL	1 3/4"- 2" x 16 1/2"
82041GL	1 3/4"- 2" x 19"
82051GL	1 3/4"- 2" x 23 1/2"
82061GL	2" x 9 1/2"
82071GL	2" x 12 1/4"
82081GL	2" x 14 1/8"
82091GL	2" x 13 13/16"
82101GL	2" x 20"
82111GL	2" x 24"
82121GL	2" x 33"
82131GL	2" - 2 1/4" x 8 1/2"
82141GL	2" - 2 1/4" x 15"
82151GL	2" - 2 1/4" x 17"
82161GL	2 1/4" x 9"
82171GL	2 1/4" x 11"
82181GL	2 1/4" x 14"
82191GL	2 1/4" x 17"
82201GL	2 1/4" x 19"
82211GL	2 1/4" x 24"
82221GL	2 1/4" x 27"
82231GL	2 1/4" - 2 1/2" x 18"
82241GL	2 1/4" - 2 1/2" x 21"
82251GL	2 1/4" - 2 1/2" x 25"
82261GL	2 1/2" x 11 1/2"
82271GL	2 1/2" x 13 1/2"
82281GL	2 1/2" x 16"
82291GL	2 1/2" x 24"
82301GL	2 1/2" x 28"
82311GL	2 3/4" x 14"
82321GL	2 3/4" x 18"

# DAYCO® COOLANT HOSE

## Dayco® Straight Radiator Hose

Designed for a wide range of light and heavy duty truck applications where the routing is relatively straight

Dayco's Straight Radiator Hose features knitted reinforcement and synthetic EPDM construction. It meets SAE J20R4, Class D-2 requirements and provides high strength and resistance to ozone and other detrimental environmental elements, coolants, and temperature variations from -40°F (-40°C) to +257°F (+125°C). **Note: NOT suitable for fuel or oil transfer.** For pressure rating see chart on page A20.



Part No.	I.D.	Length	Part No.	I.D.	Length
76075	3/4"	3'	76188	1 7/8"	3'
76088	7/8"	3'	76200	2"	3'
76100	1"	3'	76213	2 1/8"	3'
76113	1 1/8"	3'	76225	2 1/4"	3'
76125	1 1/4"	3'	76238	2 3/8"	3'
76138	1 3/8"	3'	76250	2 1/2"	3'
76150	1 1/2"	3'	76263	2 5/8"	3'
76163	1 5/8"	3'	76275	2 3/4"	3'
76175	1 3/4"	3'	76300	3"	3'

## Dayco® Gold Label® Heavy Duty Straight Radiator Hose

Designed for a wide range of light and heavy duty truck applications where the routing is relatively straight

The Dayco Gold Label Heavy Duty Straight Radiator Hose is made with the highest quality woven mesh fabric reinforcement, neoprene cover, and nitrile tube compounds to withstand the most corrosive elements in diesel engines: oil, coolants, coolant additives, and heat, with a temperature rating of -40°F (-40°C) to +212°F (+100°C). This hose meets SAE requirements J20R1, Class B Tube, Class C Cover, standard wall construction. **Note: NOT suitable for fuel or oil transfer.** For pressure rating see chart on page A20.



Part No.	I.D.	Length	Part No.	I.D.	Length
77075GL	3/4"	3'	77200GL	2"	3'
77088GL	7/8"	3'	77213GL	2 1/8"	3'
77100GL	1"	3'	77225GL	2 1/4"	3'
77113GL	1 1/8"	3'	77238GL	2 3/8"	3'
77125GL	1 1/4"	3'	77250GL	2 1/2"	3'
77138GL	1 3/8"	3'	77263GL	2 5/8"	3'
77150GL	1 1/2"	3'	77275GL	2 3/4"	3'
77156GL	1 9/16"	3'	77300GL	3"	3'
77163GL	1 5/8"	3'	77325GL	3 1/4"	3'
77175GL	1 3/4"	3'	77350GL	3 1/2"	3'
77188GL	1 7/8"	3'	77400GL	4"	3'

## Dayco® Gold Label® Heavy Duty Quick-Fit® Radiator Hose

Designed to be used in applications with multiple and/or small radius bends that would cause regular straight hose to kink or collapse

Dayco's Gold Label Heavy Duty Quick Fit Radiator Hose features one ply of fabric reinforcement applied over a fully embedded helical steel wire for increased strength and superior collapse resistance. The cover is made with the highest quality neoprene, developed to withstand the harshest environments found in heavy duty over-the-road and off-road applications. This hose meets the requirements for SAE J20R2, Class B Tube, Class C Cover, standard wall construction. This hose will withstand temperatures from -40°F (-40°C) to +212°F (+100°C). **Note: NOT suitable for fuel or oil transfer.** For pressure rating see chart on page A20.

Part No.	I.D.	Length	Part No.	I.D.	Length
75100GL	1"	4'	75263GL	2 5/8"	4'
75113GL	1 1/8"	4'	75275GL	2 3/4"	4'
75125GL	1 1/4"	4'	75288GL	2 7/8"	4'
75138GL	1 3/8"	4'	75300GL	3"	4'
75150GL	1 1/2"	4'	75313GL	3 1/8"	4'
75163GL	1 5/8"	4'	75325GL	3 1/4"	4'
75175GL	1 3/4"	4'	75338GL	3 3/8"	4'
75188GL	1 7/8"	4'	75350GL	3 1/2"	4'
75200GL	2"	4'	75400GL	4"	4'
75213GL	2 1/8"	4'	75450GL	4 1/2"	4'
75225GL	2 1/4"	4'	75500GL	5"	4'
75238GL	2 3/8"	4'	75550GL	5 1/2"	4'
75250GL	2 1/2"	4'	75600GL	6"	4'



## Dayco® Gold Label® Heavy Duty Silicone Radiator Hose

Designed for long life in heavy duty applications

This tough, reinforced silicone rubber hose resists aging from heat, chemicals, oils, and other elements that attack hoses in heavy duty applications. When installed properly with special silicone clamps, this hose will give up to six times longer service life than ordinary coolant hose. Dayco's Gold Label Heavy Duty Silicone Radiator Hose meets the requirements of SAE J20R1, Class A, standard wall construction, and has a temperature rating of -40°F (-40°C) to +350°F (+175°C). **Note: NOT suitable for fuel or oil transfer.** For pressure rating see chart on page A20.

Part No.	I.D.	Length	Part No.	I.D.	Length
78100GL	1"	3'	78225GL	2 1/4"	3'
78113GL	1 1/8"	3'	78238GL	2 3/8"	3'
78125GL	1 1/4"	3'	78250GL	2 1/2"	3'
78138GL	1 3/8"	3'	78275GL	2 3/4"	3'
78150GL	1 1/2"	3'	78300GL	3"	3'
78163GL	1 5/8"	3'	78325GL	3 1/4"	3'
78175GL	1 3/4"	3'	78350GL	3 1/2"	3'
78200GL	2"	3'	78375GL	3 3/4"	3'
			78400GL	4"	3'



# DAYCO® COOLANT HOSE

## Dayco® Special Reducers

Designed to reduce the I.D. of existing Straight, Molded and Flex hose to meet applications' needs



These molded rubber Dayco Special Reducers easily slip into the end of straight radiator hose to reduce the I.D. and provide a tight, leak proof connection. **Note: NOT suitable for applications where fuel or oil is transferred.**

Part No.	Reduction Range
76925	Reduces 1 1/2" to 1 1/4"
76950	Reduces 1 3/4" to 1 1/2"
76963	Reduces 1 3/4" to 1 5/8"
76975	Reduces 2" to 1 3/4"

## Dayco® Heater Hose Packaged 6-Foot

Designed to hang on standard pegboard hooks for retail display and self-service sales



Each of the three most popular Dayco heater hose sizes (1/2", 5/8", 3/4") is packaged in six-foot lengths in a poly bag that measures 12" wide x 17" high. Shipped 10 bags per standard case. **Note: NOT suitable for fuel or oil transfer.**

Part No.	I.D.	Length
80291	1/2"	6'
80292	5/8"	6'
80293	3/4"	6'

## Dayco® Standard Heater Hose

Designed to carry the heated coolant from the engine block to the heater core under the dashboard and return it to the engine

Dayco's standard heater hose is made for general service on light trucks and passenger cars. Constructed using all EPDM compounds and spiral reinforcement for high burst strength and excellent heat resistance of -40°F (-40°C) to +257°F (+125°C). This black cover hose is similar to SAE 20R3, Class D-2, and is specifically designed to be compatible with all common coolants and coolant additives. **Note: NOT suitable for fuel or oil transfer.** For pressure rating see chart on page A20.



Part No.	I.D.	Length
80257	1/4"	50' Carton
80258	5/16"	50' Carton
80259	3/8"	50' Carton
80270	1/2"	50' Carton
80271	5/8"	50' Carton
80272	5/8"	250' Reel
80273	3/4"	50' Carton
80274	3/4"	250' Reel

## Dayco® Insulone® Heater Hose

Designed for use in cold climate applications where efficient heat transfer is important for comfortable and cost-effective operation of the vehicle

This premium Dayco Insulone Heater Hose delivers heated coolant to the heater core with minimal heat loss. The synthetic EPDM rubber compounds and spiral reinforcement gives this hose excellent burst strength, heat resistance and compatibility with all common coolants and coolant additives. A special compound used in the insulating layer provides an added measure of protection against heat loss. Built with a black cover, this hose is similar to SAE 20R3, Class D-2 with a temperature range of -40°F (-40°C) to +257°F (+125°C). **Note: NOT suitable for fuel or oil transfer.** For pressure rating see chart on page A20.

Part No.	I.D.	Length	Part No.	I.D.	Length
80312	1/2"	50' Carton	80317	3/4"	250' Reel
80314	5/8"	50' Carton	80318	7/8"	50' Carton
80315	5/8"	250' Reel	80319	1"	50' Carton
80316	3/4"	50' Carton			



## Dayco® Gold Label® Heavy Duty Heater Hose

Designed to provide reliable heavy duty and off-road equipment service

Dayco's Gold Label Heavy Duty Heater Hose is our quality rubber heater hose, made with the highest quality EPDM compounds and heavy duty spiral reinforcement to withstand high coolant and under-hood temperatures of -40°F (-40°C) to +257°F (+125°C), and provide excellent resistance to coolant and coolant additives. This hose exceeds SAE 20R3, Class D-1, Type EC, standard wall construction requirements. **Note: NOT suitable for fuel or oil transfer.** For pressure rating see chart on page A20.

Part No.	I.D.	Length	Part No.	I.D.	Length
80229GL	1/2"	50' Carton	80235GL	3/8"	250' Reel
80230GL	3/8"	50' Carton	80236GL	5/8"	250' Reel
80231GL	5/8"	50' Carton	80237GL	3/4"	250' Reel
80232GL	3/4"	50' Carton	80238GL	7/8"	250' Reel
80233GL	7/8"	50' Carton	80239GL	1"	250' Reel
80234GL	1"	50' Carton	80240GL	1/2"	250' Reel



## Dayco® Gold Label® Silicone Heater Hose

Designed for long life in heavy duty applications

Dayco's Gold Label Silicone Heater Hose is made with special silicone compounds and reinforced with one ply of braided polyester yarn. This SAE 20R3, Class A hose is highly resistant to the deteriorating effects of oil, ozone, coolants, and coolant additives. In addition to being extremely flexible, this silicone hose has the highest temperature rating, namely -40°F (-40°C) to +350°F (+175°C), and longest service life of any Dayco heater hose product. When installed properly with special silicone clamps, this hose will give up to six times longer service life than ordinary coolant hose. **Note: NOT suitable for fuel or oil transfer.** For pressure rating see chart on page A20.

Part No.	I.D.	Length	Part No.	I.D.	Length
80241GL	5/8"	25' Carton	80251GL	5/8"	50' Carton
80242GL	3/4"	25' Carton	80252GL	3/4"	50' Carton
80243GL	1/2"	25' Carton	80253GL	1/2"	25' Carton
80244GL	1"	25' Carton	80254GL	1"	50' Carton
80245GL	3/8"	25' Carton	80255GL	3/8"	50' Carton




# DAYCO® HOSE CLAMPS

## Dayco® Hose Clamps For Automotive And Fleet Applications

Designed for automotive and fleet applications where clamping of hoses is required

All Dayco hose clamps feature a heavy-duty worm gear with stainless steel band and housing. Their four piece design and arched band slots provide added strength and smooth operation. Product offerings include "Standard" clamps with a yellow zinc dichromate plated, slotted, hex head screw, "All Stainless Steel" clamps, featuring a 410 grade, slotted hex head screw, "High Torque" clamps with an extra wide band, all stainless steel super heavy-duty construction, and a 410 grade, slotted hex head screw, and "Silicone" clamps (for use on silicone hoses) with an extended inner liner that covers the band slots to prevent hose damage, and a yellow zinc dichromate plated, slotted, hex head screw.

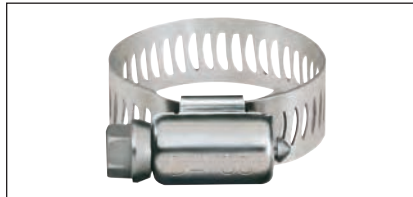


### Series 91004 through 91188

Standard clamps... featuring yellow zinc dichromate plated slotted hex head screws.



### Series 92004 through 92104


All stainless steel clamps... featuring 410 grade slotted hex head screws.

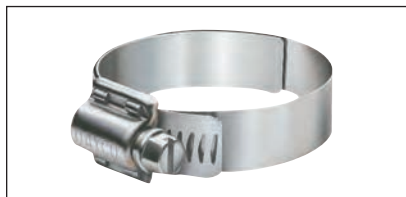

### Series 92008 through 92248

FOR USE ON SILICONE HOSE

Silicone clamps with extended inner liner covering band slots to prevent hose damage featuring yellow zinc dichromate plated slotted hex head screws.

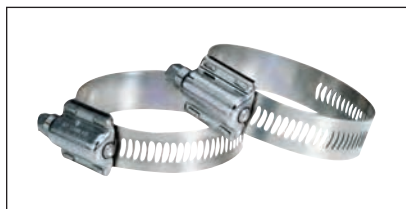

### Series 92302 through 92305

HI-TORQUE

Extra wide band, all stainless steel super heavy-duty clamps...featuring 410 grade slotted hex head screws.

## Dayco® Hose Clamps For Automotive And Fleet Applications

Fits Hose I.D.		Popular Applications	Clamp	Clamp	Standard	Stainless	Silicone
From	To		Diam. Min.	Diam. Max.	Part No.	Part No.	Part No.
3/8"	1/2"	Dayco Miniature Clamp Air Hose, Air Line Hose, Fuel Lines	7/32"	5/8"	91004	92004	-
			7/16"	25/32"	91006	92006	-
3/8"	5/8"		1/2"	29/32"	91008	92008	-
3/8"	5/8"		11/16"	15/16"	-	-	92208
3/8"	5/8"	Heater Hose	9/16"	1-1/16"	91010	92010	-
3/8"	5/8"	Heater Hose	13/16"	1-1/16"	-	-	92210
5/8"	3/4"	Heater Hose	11/16"	1-1/4"	91012	92012	-
5/8"	3/4"	Heater Hose	15/16"	1-1/4"	-	-	92212
3/4"	1"	Vacuum Hose	13/16"	1-1/2"	91016	92016	92216
1"	1-1/4"	Vacuum and Booster Brake Hose	13/16"	1-3/4"	91020	92020	92220
1-1/4"	1-1/2"		1-1/16"	2"	91024	92024	92224
1-1/4"	1-3/4"	Car Radiator Hose	1-5/16"	2-1/4"	91028	92028	92228
1-1/2"	2"	Larger Size Radiator	1-9/16"	2-1/2"	91032	92032	92232
1-3/4"	2-1/4"	Hose Truck Radiator and Gas Tank Hose	1-13/16"	2-3/4"	91036	92036	92236
2"	2-1/2"		2-1/16"	3"	91040	92040	92240
2-1/4"	2-3/4"	Truck and Tractor	2-5/16"	3-1/4"	91044	92044	92244
2-1/2"	3"		2-9/16"	3-1/2"	91048	92048	92248
3"	3-1/4"	Air Vent Hose	2-13/16"	3-3/4"	91052	92052	-
3-1/4"	3-1/2"		3-1/16"	4"	91056	92056	-
3-1/4"	3-1/2"	Air Vent Hose	3-5/16"	4-1/4"	91060	92060	-
3-1/2"	4"		3-9/16"	4-1/2"	91064	92064	-
			4-1/8"	5"	91072	92072	-
			4-5/8"	5-1/2"	91080	92080	-
			5-1/8"	6"	91088	92088	-
Order all these sizes by O.D. hose size			5"	6-1/2"	91096	92096	-
			6-1/8"	7"	91104	92104	-
			5-5/8"	8-1/2"	91128	-	-
			7-1/8"	10"	91152	-	-
(All clamps packaged 10 per box)			9-3/8"	12-1/4"	91188	-	-
			1 1/4"	2 5/8"	-	92302	-
			2 1/8"	4 1/8"	-	92303	-
			4"	6 1/8"	-	92304	-
			6 1/8"	9"	-	92305	-



# DAYCO® SERVICE HOSE

## Dayco® Barrier Refrigerant Hose Style DBH

Designed for use with R12 and R134A refrigerant systems only



Dayco's Style BH/DBH Barrier Refrigerant Hose features nitrile/nylon barrier/neoprene tube construction, and black EPDM cover that is resistant to abrasion, ozone, and heat, with textile reinforcement. The temperature range is from -22° F to +203° F. This hose is recommended for use with coupling style BL and SB.

Part No.	I.D.	O.D.	Length
80442	5/16"	3/4"	25' Carton
80443	5/16"	3/4"	50' Carton
80444	5/16"	3/4"	250' Reel
80447	13/32"	29/32"	25' Carton
80448	13/32"	29/32"	50' Carton
80449	13/32"	29/32"	250' Reel
80452	1/2"	1"	25' Carton
80453	1/2"	1"	50' Carton
80454	1/2"	1"	250' Reel
80457	5/8"	1 1/8"	25' Carton
80458	5/8"	1 1/8"	50' Carton
80459	5/8"	1 1/8"	250' Reel

## Dayco® Transmission Oil Cooler/Power Steering Return Line Hose

Designed to connect the transmission to an external cooler or as a return line between the power steering mechanism and the hydraulic pump



Dayco's Transmission Oil Cooler/Power Steering Return Line Hose has a synthetic rubber tube and cover to resist oil, ozone, heat and aging. It's reinforced with braided cord for increased strength, supporting a working pressure of 250psi. It is designed to handle transmission oil temperatures up to +257°F (+125°C) **Note: NOT suitable for power steering pressure lines.** Similar to SAE J189 type hose.

Part No.	Braid	I.D.	Length	Working Pressure (psi)
80383	1	5/16"	25' Carton	250
80384	1	5/16"	50' Carton	250
80387	1	11/32"	25' Carton	250
80388	1	11/32"	50' Carton	250
80391	1	3/8"	25' Carton	250
80392	1	3/8"	50' Carton	250

## Dayco® Fuel Line Hose

Designed for use on all types of carbureted gasoline engines. Not subject to CARB or EPA requirements

Dayco's Fuel Line Hose offers excellent resistance to oil, gasoline, grease, and weather. It is constructed with a neoprene cover and nitrile tube for use with leaded and unleaded gasoline and diesel fuel, reinforced with a single ply of braided cord. Dayco's Fuel Line Hose meets SAE J30R7 requirements, and meets SAE J1527 type B, class 2, style R1 specifications. **Note: NOT suitable for gasoline/oil mixed fuels, alcohol blended fuels, or bio-diesel fuel.**



Working				Max.	Working				Max.
Part No.	I.D.	Length	Pressure (psi)		Part No.	I.D.	Length	Pressure (psi)	
80051	1/8"	25' Spool	50		80063	3/8"	25' Spool	50	
80052	1/8"	50' Carton	50		80064	3/8"	50' Carton	50	
80053	1/8"	250' Reel	50		80065	3/8"	250' Reel	50	
80054	3/16"	25' Spool	50		80066	7/16"	25' Spool	35	
80055	3/16"	50' Carton	50		80067	7/16"	50' Carton	35	
80056	3/16"	250' Reel	50		80068	7/16"	250' Reel	35	
80057	1/4"	25' Spool	50		80073	1/4"	2' Clamshell	50	
80058	1/4"	50' Carton	50		80074	5/16"	2' Clamshell	50	
80059	1/4"	250' Reel	50		80075	3/8"	2' Clamshell	50	
80060	5/16"	25' Spool	50		93036	1/2"	25' Spool	35	
80061	5/16"	50' Carton	50		93037	5/8"	25' Spool	35	
80062	5/16"	250' Reel	50		93038	3/4"	25' Spool	35	

## Dayco® DAYPERM™ Hose

Designed for stringent emission control requirements governing fuel hose applications

This low permeation, multi-layered rubber hose is recommended as a fuel liquid or vapor carrying component for low to medium pressure (50 psi or less, not fuel injection). As such it is ideally suited for automotive, lawn and garden, off-road and small industrial trucks and truck fleet applications. This hose is compatible with leaded, unleaded, diesel, and gasohol fuels. Dayco DAYPERM™ hose has received approval for use in California market under Component Executive Order C-U-06-030 and meets SAE30R11 applications.



It meets SAE 30R7 pressure requirements and should be used in place of conventional 30R7 for gasohol and oil/gas mixes. **Note: NOT suitable for bio-diesel or for fuel injection.**

Part No.	I.D.	Length		Part No.	I.D.	Length	
80142	1/4"	2'	Clamshell	80148	5/16"	50'	Box
80143	1/4"	25'	Spool	80149	5/16"	250'	Reel
80144	1/4"	50'	Box	80150	3/8"	2'	Clamshell
80145	1/4"	250'	Reel	80151	3/8"	25'	Spool
80146	5/16"	2'	Clamshell	80152	3/8"	50'	Box
80147	5/16"	25'	Spool	80153	3/8"	250'	Reel

# DAYCO® SERVICE HOSE

## Dayco® Fuel Injection Hose

Designed to safely and efficiently handle the higher pressure, temperatures, and chemical problems inherent in today's hotter running, fuel injected engines



Dayco's Fuel Injection Hose is constructed with a tough fluoro-elastomer, low-permeation, gasohol and diesel fuel inner tube that provides exceptional resistance to alcohol blended fuels that weaken normal fuel injection hose. A special braided reinforcement delivers a recommended working pressure of 100psi, with a burst strength of 900psi. The abrasion-resistant outer cover resists temperature extremes of -30°F (-34.5°C) to +300°F (+149°C) as well as oil, grease, ozone, and coolants. Dayco Fuel Injection Hose meets SAE J30R9 and meets

CARB requirements (EO# C-U-07-017). For easy and attractive merchandising, this hose is available in 18" clamshell packs.

**Note: Suitable for diesel and bio-diesel fuel.**

Part No.	I.D.	Length	Part No.	I.D.	Length
80078	1/4"	18"	80088	1/4"	25' Spool
Clamshell			80089	5/16"	25' Spool
80079	5/16"	18"	80090	3/8"	25' Spool
Clamshell			80091	1/4"	250' Reel
80080	3/8"	18" Clamshell	80092	5/16"	250' Reel
80083	1/4"	10'	80093	3/8"	250' Reel
Carton					
80084	5/16"	10'			
Carton					
80085	3/8"	10' Carton			

## Dayco® In-Tank Fuel Line Hose

Designed for use in fuel injection systems where the hose may be submerged in the fuel tank



Dayco's In-Tank Fuel Line Hose is capable of handling gasoline, alcohol blended gasoline or diesel fuel used in mobile and stationary applications. This hose has a maximum working pressure of 0.69 MPa (100 psi) and is suitable for use in normal operating temperatures of -29° F (-34°C) to 212° F to (100°C) and intermittent use at 257° F (125°C) The Dayco In-Tank Fuel Line Hose meets SAE J30R10 requirements.

Part No.	I.D.	Length
80160	5/16"	12"

## Dayco® Plastic Fuel Line And Vacuum Tubing Connectors

Designed for use with all traditional fuel and coolant hose applications

These Dayco glass-filled nylon, straight, "Y", elbow, tee and reducing connectors produce a leak proof splice between vacuum line tubing, fuel line hose, coolant hose, or other small I.D. hoses. Ideally suited for all jobs requiring 3/32", 1/8", 5/32" and 3/16" I.D. connections. A molded circumferential flange provides a hose stop that assures that the hose is inserted to the proper depth. The connectors are packaged and sold in poly bags, five per package.



Part No.	Size	Style	Part No.	Size	Style
80600	3/32"	Y	80622	5/32"	Elbow
80601	1/8"	Y	80623	3/16"	Elbow
80603	3/16"	Y	80630	3/32"	Tee
80610	3/32"	Straight	80631	1/8"	Tee
80611	1/8"	Straight	80632	5/32"	Tee
80612	5/32"	Straight	80633	3/16"	Tee
80613	3/16"	Straight	80640	1/8" > 3/32"	Reducer
80620	3/32"	Elbow	80642	5/32" > 1/8"	Reducer
80621	1/8"	Elbow	80643	1/4" > 3/16"	Reducer

## Dayco® Anti-Smog/PCV Hose

Designed for applications in cars and trucks where petroleum vapors and blow-by gases are recirculated through the intake manifold for total combustion and reduced emissions, and on gasoline engines for fuel line applications

This hose features a tube and cover compound that resists oil and helps reduce emissions to acceptable EPA levels. The single ply of cord reinforcement provides increased strength and flexibility. Dayco's Anti-Smog/PCV Hose meets SAE J30R7 requirements. It's available in either 50' cartons or 20" clamshell packs for ease of merchandising.



**Note: NOT suitable for fuel injection applications.**

Part No.	I.D.	Max. Working Pressure (psi)	Length
80069	11/32"	50	50' Carton
80070	15/32"	35	50' Carton
80071	19/32"	35	50' Carton
80369	11/32"	50	20" Clamshell
80370	15/32"	35	20" Clamshell
80371	19/32"	35	20" Clamshell

## Dayco® Windshield Washer/Vacuum Tubing

Designed to replace worn windshield washer tubing, as well as general automotive vacuum applications such as retractable headlights, sensors, etc.



Dayco Windshield Washer/Vacuum Tubing has a temperature rating of -40°F (-40°C) to +212°F (+100°C). It features a flexible, long-life rubber construction that resists oil, grease, and heat deterioration, and remains flexible at low temperatures. This tubing meets the material specification for SAE J1037. It's available in either 50' spools, or 6' clamshell packs for easy merchandising.

Part No.	I.D.	O.D.	Length
80204	1/4"	29/64"	50' Spool
80205	7/64"	7/32"	50' Spool
80206	5/32"	11/32"	50' Spool
80207	7/32"	23/64"	50' Spool
80208	9/32"	3/8"	50' Spool
80209	7/64"	7/32"	6' Clamshell
80210	5/32"	11/32"	6' Clamshell
80211	7/32"	23/64"	6' Clamshell
80216	5/32"	11/32"	250' Reel
80217	7/32"	23/64"	250' Reel

## Dayco® Emission Control Carburetor Pre-Heater Duct Hose

Designed to connect the air cleaner to the exhaust manifold to prevent carburetor icing in cold weather




Dayco's Emission Control Carburetor Pre-Heater Duct Hose features a heavy duty, flexible, aluminum core and corrugated construction that can easily be cut with a sharp knife to facilitate the proper fit between air cleaner and exhaust manifold. The close inside diameter tolerance provides a tight fit to reduce carburetor icing. It's available in attractive, convenient, point-of-purchase packaging.

Part No.	I.D.	Part No.	I.D.	Length
80096	1 1/2"	80102	2"	12"
80097	1 1/2"	80104	2"	36"
80098	1 1/2"	80103	2"	18"
80099	1 3/4"	80105	25mm	36"
80101	1 3/4"	80106	50mm	21"

## Dayco® Autoflex® Defroster Duct Hose

Designed for all under-dash air connections, hot or cold, including defroster vents and fresh air intakes

Dayco's Autoflex Defroster Duct Hose is made with tough, lightweight, and flexible reinforced vinyl, ideal for all vehicle air ducting, either hot or cold. It installs in minutes and can be clamped or taped to existing fittings. Available in 15 I.D. sizes, it services a wide range of applications. Individually boxed 6' lengths are compressed to 28" per box for easy stocking.

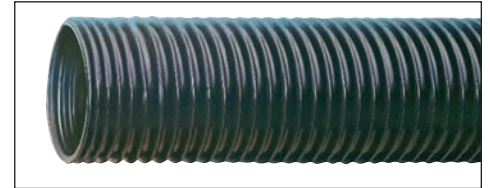

Part No.	I.D.	Length	Part No.	I.D.	Length
80165	1 1/4"	6'	80173	3 1/2"	6'
80166	1 1/2"	6'	80176	4 1/2"	6'
80167	1 3/4"	6'	80174	3 3/4"	6'
80168	2"	6'	80175	4"	6'
80169	2 1/4"	6'	80177	5"	6'
80170	2 1/2"	6'	80178	5 3/8"	6'
80171	2 3/4"	6'	80179	6"	6'
80172	3"	6'			

## Dayco® Driveway Signal Hose

Designed for driveway use in service station and garages

Dayco's Driveway Signal Hose is tough enough to withstand the weight of any vehicle, yet is sensitive enough to detect the slightest pressure, signaling a customer's presence.



Part No.	I.D.	Length
80186	3/8"	50' Carton
80187	3/8"	100' Carton
80188	3/8"	125' Carton
80189	3/8"	200' Carton

## Dayco® Fuel Filler Hose

Designed to connect the filler neck to the fuel tank on cars, light trucks and boats as well as auxiliary fuel tanks on RVs

Dayco Fuel Filler Hose handles leaded and unleaded gasoline, diesel fuel, gasohol, and oxygenated fuels. The rugged, double reinforced construction helps prevent hose collapse. The hose meets SAE J30R7 and SAE J1527, Style R2 requirements. It's supplied in three foot lengths in six different I.D.s to maximize application coverage.




Part No.	I.D.	Length	Part No.	I.D.	Length
80303	1 1/2"	3'	80306	2"	3'
80304	1 3/4"	3'	80307	2 1/4"	3'
80305	1 7/8"	3'	80308	2 1/2"	3'

# DAYCO® SERVICE HOSE

## Dayco® Service Station Shop Air and Air Impact Tool Hose

Designed for high quality general purpose air hose. Fills many applications around a service station or manufacturing shop such as inflating tires, blow nozzles and machine air connections

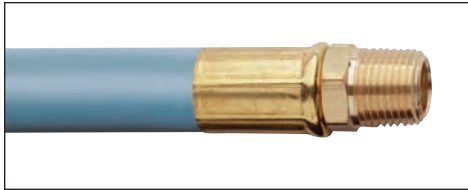

Dayco's Air Hose features a heavy, abrasion resistant cover combined with a specially reinforced, seamless, non-porous smooth tube that provides increased pull and burst strength, durability, and maximum service life.

Part No.	Hose I.D.	Length	Max Working Pressure (psi)	Couplings
80001	1/4"	250' Reel	200	None
80002	1/4"	25' Coupled	200	1/4" - Male/Male
80003	1/4"	50' Coupled	200	1/4" - Male/Male
80004	3/8"	25' Coupled	200	3/8" - Male/Male
80005	3/8"	50' Coupled	200	3/8" - Male/Male
80006	3/8"	25' Coupled	200	1/4" - Male/Male
80007	3/8"	50' Coupled	200	1/4" - Male/Male
80010	1/2"	25' Coupled	200	1/2" - Male/Male
80011	1/2"	50' Coupled	200	1/2" - Male/Male

## Dayco® Multi-Purpose Hose

The Dayco Multi-Purpose Hose replaces the Dayco GST® II Hose

Designed to handle air and water service as well as many agricultural chemicals up to 200 psi.



Constructed of EPDM tube and cover, the Dayco Multi-Purpose Hose resists heat, sunlight, ozone and weathering while its two-ply of reinforcement provides strength and resistance to kinking. This hose exceeds RMA Class C medium oil resistance requirement. In addition, the Dayco Multi-Purpose Hose has been designed to withstand temperature variations of -40°F (-40°C) to +212°F (+100°C). **Note: NOT suitable for the transfer of petroleum products, steam, paint spray, unleaded gasoline, anhydrous ammonia, or LP gas service.**

**anhydrous ammonia, or LP gas service.**

Part No.	Reel Qty.	I.D.	Braid	O.D.	Max. Recommended Working Pressure (psi)
80130	750' + 50'-0'	1/4"	2	1/2"	200
80131	650' + 50'-0'	3/8"	2	5/8"	200
80132	500' + 50'-0'	1/2"	2	13/16"	200
80133	400' + 50'-0'	5/8"	2	31/32"	200
80134	350' + 50'-0'	3/4"	2	1 7/64"	200
80135	250' + 50'-0'	1"	2	1 13/32"	200

## Dayco® Premium Multi-Purpose Hose

The Dayco Premium Multi-Purpose Hose replaces the Dayco Thoro-Flo® Multi-Purpose Hose

Designed to transmit air, water, oil and chemicals in service up to 300psi

The Dayco Premium Multi-Purpose Hose consisting of a nitrile tube, neoprene cover and two-ply of textile reinforcement can be depended upon to provide long lasting service in a variety of applications requiring the transmission of air, water, oil or chemicals. The Dayco Premium Multi-Purpose Hose features a tube compounded to deliver maximum oil resistance. In addition, the Dayco Premium Multi-Purpose Hose has been designed to withstand temperature variations of -20°F (-29°C) to +212°F (+100°C). **Note: NOT suitable for steam, paint spray, unleaded gasoline, anhydrous ammonia, or LP gas service.**



50 Ft. Part No	250 Ft. Part No	I.D.	Reinforcing Layers	O.D.	Max Recommended Working Pressure (psi)
80015	80016	1/4"	2	5/8"	300
80019	80020	5/16"	2	11/16"	300
80023	80024	3/8"	2	3/4"	300
80027	80028	1/2"	2	29/32"	300
80031	80032	5/8"	4	1 1/16"	300
80035	80036	3/4"	4	1 1/4"	300
80039	80040	1"	4	1 17/32"	300

## Dayco® Power Brake Vacuum Hose

Designed for use on power brake vacuum hose applications

Dayco's Power Brake Vacuum Hose features a tough outer cover and a braided reinforcement for increased strength and durability. The hose is supplied without couplings, and it is recommended that hose clamps be used. This hose meets SAE J1403a, Type L, Class B and DOT FMVSS 106 requirements, and resists temperature extremes of -40°F (-40°C) to +257°F (+125°C).




Part No.	Braid.	I.D.	O.D.	
80094	1	11/32"	11/16"	50' Carton
80095	1	15/32"	13/16"	50' Carton



# DAYCO® SERVICE HOSE

## Dayco® Air Brake Hose

Designed for use on truck and bus compressed air brake systems

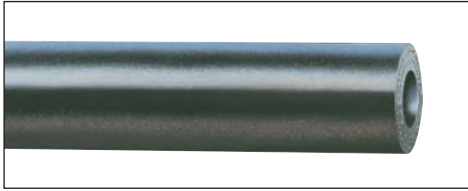

Dayco's Air Brake Hose features a high quality, smooth rubber cover that's weather, abrasion, and ozone resistant; reinforcement of four textile spirals for a rated minimum burst pressure of 900 psi, and a seamless synthetic inner tube with a temperature rating of -50°F (-40°C) to +212°F (+93°C). This hose meets SAE J1402 and DOT FMVSS 106, Type A requirements for 3/8" and 1/2" SP dimension hose.

**Special Notes: Air Brake Hose assemblies must be identified by the assembler per DOT FMVSS 571.106 if used in motor vehicle air brake applications**

Part No.	I.D.	Length	Part No.	I.D.	Length
80372	3/8"	50' Carton	80376	1/2"	50' Carton
80373	3/8"	250' Reel	80377	1/2"	250' Reel
80374	3/8"	500' Reel			

## Dayco® Gold Label® Heavy Duty Hump Hose, Elbows and Reducer Sleeves

Designed as a fitting to aid in conveying air from an exterior air filter to the engine



Dayco's Gold Label Heavy Duty Hump Hose, Elbows, and Reducer Sleeves are molded neoprene rubber, with smooth radii and inside surfaces to maximize air flow and keep the air column streamlined and out of the turbulent flow range. This line of fittings has a temperature range of -40°F (-40°C) to +250°F (+121°C). The Dayco Hump Hose fittings allow up to 20° of misalignment and cushion the system from harmful vibrations.

# DAYCO® HYDRAULIC HOSE AND COUPLINGS


*For a complete listing of Dayco low, medium and high pressure hydraulic hose, refer to Dayco Hydraulic Hose and Coupling Catalog.*

## Dayco® Style DR6 Hydraulic Hose

Meets SAE 100R6

Designed for use as a low pressure hydraulic line, flexible fuel line, power steering return line, and lubrication line

Dayco's Style DR6 Hydraulic Hose features a nitrile tube and neoprene MSHA-approved cover, with a single textile braid reinforcement. The temperature range is from -40° F to +250° F. This hose is recommended for use with coupling Style DC.

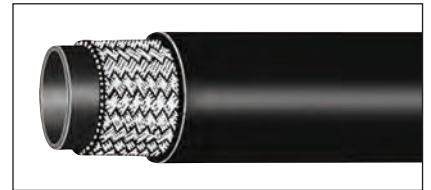


## Dayco® Style DR17 Hydraulic Hose

Exceeds SAE 100R17

Designed for timber processing and handling, agricultural and construction industries requiring an extra tough rubber cover for abrasion resistant applications

Dayco's Style DR17 Hydraulic Hose features a synthetic rubber tube and abrasion resistant cover. Hose IDs of 1/4", 3/8" and 1/2" have one braid of high tensile strength steel reinforcement. Hose IDs of 5/8", 3/4" and 1" consist of two high tensile strength steel reinforcement braids. It is recommended for use with coupling Series DC and PG(12 & 16 size only).

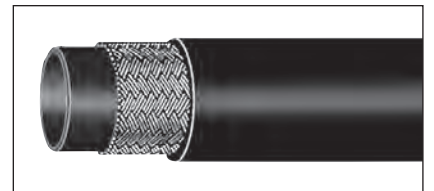


## Dayco® Style DB7 Push-On Hose

Designed for low-pressure transmission of oil, gasoline, air, water, coolants, etc.

**Note: NOT suitable for impulse applications.**

Dayco's Style DB7 Specialty Push-On Hose features a nitrile tube and black synthetic rubber cover that is resistant to both oil and weather, and MSHA-approved, with a single textile braid reinforcement. The temperature range is from -40° F to +212° F (160° F on gaseous applications). This hose is recommended for use with coupling Series PO, BI, and DC. *Not intended for alcohol blended fuels.*

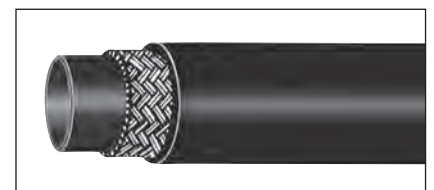


# DAYCO® HYDRAULIC HOSE AND COUPLINGS

## Dayco® Style DR2 Hydraulic Hose

Meets SAE 100R2AT

Designed for high pressure hydraulic lines on off-the-road construction equipment, machine tools, farm and marine equipment

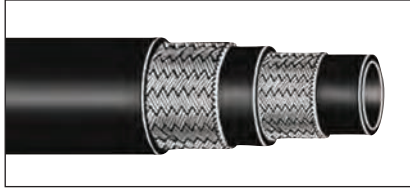


Dayco's Style DR2 Hydraulic Hose features an oil resistant synthetic rubber tube, a black synthetic rubber cover that is resistant to both oil and weather and, a reinforcement of two high-tensile steel wire braids. The temperature range is from  $-40^{\circ}$  F to  $+212^{\circ}$  F. This hose is recommended for use with coupling Styles PG and DC.

## Dayco® Style DR12X Hydraulic Hose

Meets SAE 100R12

Designed for high pressure hydraulic service

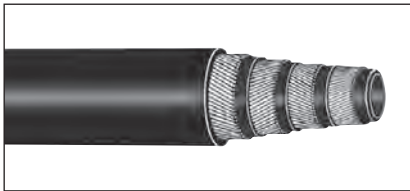

Dayco's Style DR12X Hydraulic Hose features an oil resistant synthetic rubber tube and a synthetic rubber cover that is resistant to both oil and weather and MSHA approved, with a reinforcement of four spiral layers of high-tensile steel wire. The temperature range is from  $-40^{\circ}$  F to  $+250^{\circ}$  F. Compared to braided hose, this hose provides longer life under the higher temperatures and pressures of modern hydraulically operated equipment, and meets all SAE 100R12 requirements. This hose is recommended for use with coupling Style

PG.

## Dayco® Style DFL Fuel and Oil Hose

Designed for low pressure transmission of oil, gasoline, air or water




Dayco's Style DFL Fuel and Oil Hose features a nitrile tube and black synthetic rubber cover that is resistant to both oil and weather, with one or two textile braid(s) reinforcement. The temperature range is from  $-40^{\circ}$  F to  $+212^{\circ}$  F. This hose is recommended for use with coupling Styles BI and DC. **Note: NOT suitable for use in fuel injection applications or alcohol blended fuels.**

## Dayco® Style DPW DayBlast™ Pressure Washer Hose

Designed for use with pressure washer applications

Dayco's DayBlast™ pressure washer hose is a 1 wire SN construction designed specifically for the demands of today's pressure washer applications. This hose features a grey non-marking synthetic rubber cover, a nitrile synthetic rubber blend tube, a temperature capability of up to 300° F and working pressures up to 3,625 psi. This hose is recommended for use with HY/DC couplings. **Note: *NOT suitable for steam applications.***

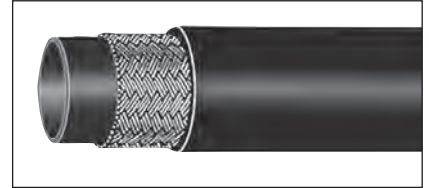


## Dayco® Style DR16 Hydraulic Hose

Meets SAE 100R16

Designed as a replacement for SAE 100R2 high pressure hydraulic lines on off-the-road construction equipment, machine tools and mining equipment

Dayco's Style DR16 Hydraulic Hose features an oil resistant synthetic rubber tube and synthetic rubber cover that is resistant to both oil and weather and a reinforcement of two high-tensile steel wire braids. Compared to SAE 100R2 hose, Dayco's DR16 hose has a 50% smaller bend radius for tighter installations and easier routing. The temperature range is from -40° F to +250° F. This hose is recommended for use with coupling Styles PG and DC.

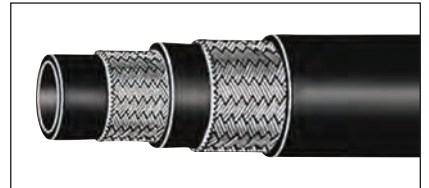


## Dayco® Style DGL Hydraulic Hose

Meets SAE J1402 Type A1, DOT FMVSS-106

Designed for use on high temperature truck and bus applications such as diesel fuel, gasoline, hot oil, air brakes and hydraulic lines

Dayco's Style DGL Hydraulic Hose features a seamless chlorinated polyethylene tube and a black textile braid cover that is oil and mildew resistant, with a reinforcement of an inner textile braid and a high-tensile steel wire braid. DGL Hose meets SAE specification J1402, Type A1 and is approved for DOT FMVSS-106 air brake applications. The temperature range is from -40° F to +300° F. This hose is recommended for use with coupling Styles GL and DC.

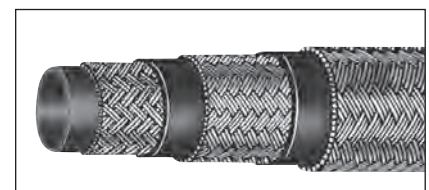


# DAYCO® HYDRAULIC HOSE AND COUPLINGS

## Dayco® Style DR1 Hydraulic Hose

Meets SAE 100R1AT

Designed for use as medium pressure hydraulic lines on mobile equipment, machine tools and farm machinery

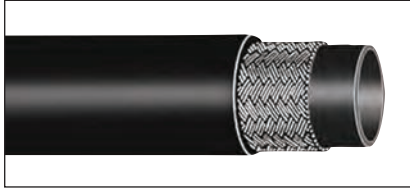


Dayco's Style DR1 Hydraulic Hose features an oil resistant, seamless synthetic rubber tube and cover that is weather resistant with a single high-tensile-steel wire braid reinforcement for increased strength. Style DR1 Hose meets SAE 100R1 AT requirements. The temperature range is from -40° F to +212° F. This hose is recommended for use with coupling Series PG and DC.

## Dayco® Style DR7 Hydraulic Hose

Meets SAE 100R7

Designed for use in medium pressure hydraulic systems which require a thermoplastic tube

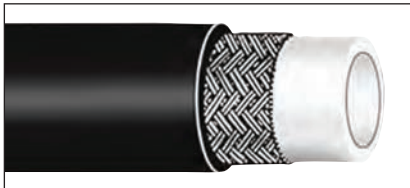

Dayco's Style DR7 Hose features a thermoplastic tube and black polyurethane, pin-pricked cover that is abrasion resistant, with a single polyester fiber braid reinforcement. The temperature range is from -40° F to +200° F. This hose is recommended for use with coupling Style DC.

## Dayco® Style DR7E Hydraulic Hose

Meets SAE 100R7 Non-Conductive

Designed for use in medium pressure hydraulic systems which require a non-conductive hose and a thermoplastic tube

Dayco's Style DR7E Hydraulic Hose features a thermoplastic tube and orange polyurethane, non-pin-pricked cover that resists abrasion, with a single polyester fiber braid reinforcement. The temperature range is from -40° F to +200° F. This hose is recommended for use with coupling Style DC.



## Dayco® Style DR14 Specialty Hose

Meets SAE 100R14A

Designed for use with corrosive and/or high temperature fluids, but NOT recommended for fuel applications


Dayco's Style DR14 Specialty Hose features a white extruded Teflon® smooth-bore tube. The cover consists of one braid of high-tensile stainless steel wire. The temperature range is from -65°F to +450°F. For steam, the maximum operating pressure is 200 PSI at +388°F. This hose is recommended for use with coupling Style 91N. **Note: May be used from the air compressor to the air reservoir on truck air brake applications.**



## Dayco® Style DTC Push-On Hose

Designed for low pressure transmission of oil, gas, air, water, coolants, etc. where operating pressures do not exceed 300 PSI

Dayco's Style DTC Push-On Hose features a nitrile tube and impregnated textile braid cover that is oil and mildew resistant, with a single textile braid reinforcement. The temperature range is from -40° F to +200° F (160° F on gaseous applications). This hose is recommended for use with coupling Styles PO and BI. **Note: NOT recommended for use on impulse applications.**

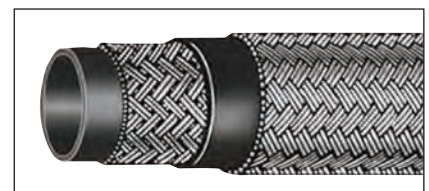


# DAYCO® HYDRAULIC HOSE AND COUPLINGS

## Dayco® Style DR4 Hydraulic Hose

Meets SAE 100R4

Designed for use as suction or return line on hydraulic systems

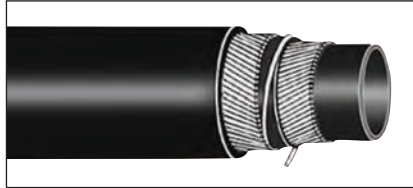


Dayco's Style DR4 Hydraulic Hose features a nitrile tube and synthetic rubber cover that is both oil and weather resistant, with a single textile braid and helix wire reinforcement for exceptional flexibility. Its vacuum rating is 25 inches Hg, and the temperature range is from -40° F to +250° F. This hose is recommended for use with coupling Styles DC (12, 16 & 20 size only) and PG.

## Dayco® Style DR5 Hydraulic Hose

Meets SAE 100R5, SAE J1402 Type All and DOT FMVSS-106

Designed for use as a high temperature, medium pressure hydraulic hose on material handling equipment, off-the-road equipment, machine tools and other air, water or oil service

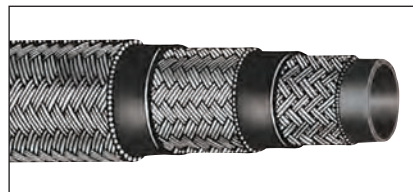

Dayco's Style DR5 Hydraulic Hose features an oil resistant synthetic rubber tube, an impregnated textile braid cover that is resistant to oil and mildew, with a single textile inner braid and single high-tensile steel wire braid reinforcement. The temperature range is from -40° F to +212° F (300° F intermittent). This hose is recommended for use with coupling Styles DN and DC.

## Dayco® Protective Nylon Sleeving

ISO 6945 Certified

Designed for protection of hose where abrasion may exist



Dayco's Protective Nylon Sleeving of tubular weave nylon construction offers excellent abrasion protection while the exceptionally smooth interior wall of the sleeve provides for free movement of the hose within the sleeve.


# DAYCO® HYDRAULIC HOSE AND COUPLINGS

*For a complete listing of Dayco couplings and adapters refer to Dayco Hydraulic Hose and Coupling Catalog #043420B.*

## Dayco® Beadlock Couplings

Designed for use with style BH/DBH hose

Constructed of aluminum and/or steel, Dayco's Beadlock AC Couplings are commonly used for low to high pressure refrigerant applications for automotive and heavy duty vehicles.

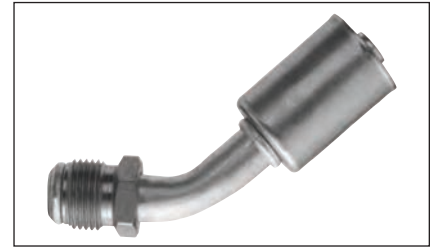


## Dayco® Permanent Crimp Couplings

Available in coupling styles 91N, DC and PG

Designed for use with the following hose styles: DR6, DR17, DB7, DR2, DR12X, DL6/DFL, DR16, DGL, DR1, DR7, DR7E, DR14, DR4 and DR5

Dayco's Permanent Crimp Couplings are one piece steel, aluminum or brass material. Typically, permanent crimp couplings are used in a wide variety of applications, ranging from low-pressure refrigerant applications to high-pressure hydraulic lines on off-the-road construction equipment, machine tools, farm equipment and marine equipment.

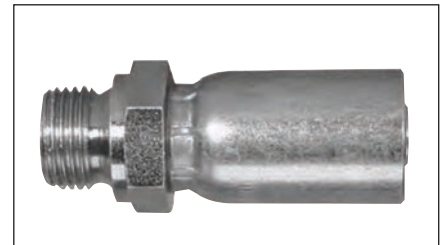


## Dayco® Reusable Couplings

Available in coupling styles DN and GL

Designed for use with styles DGL and DR5 hose

Constructed of steel, Dayco's Reusable Couplings are commonly used for medium pressure applications found on truck and bus applications, material handling equipment, off-the-road equipment and machine tools.

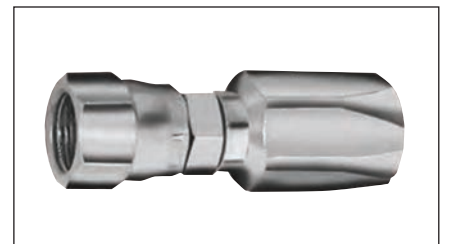




# DAYCO® HYDRAULIC HOSE AND COUPLINGS

## Dayco® Specialty Couplings

Available in coupling styles PO and BI


Designed for use with styles DB7, DDFL and DTC hose

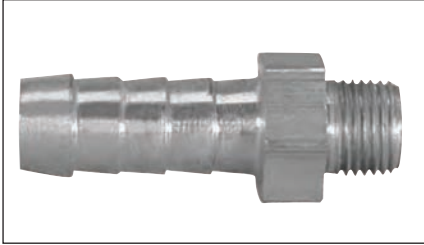

This Specialty Coupling category covers one piece couplings and barbed inserts. Made of steel and/or brass, these couplings are suited for applications such as low pressure transmission of oil, gas, air, water, etc. In some cases, they are also used on medium pressure applications for transmission of corrosive or high temperature fluids.

## Dayco® Adapters

Designed for use with all styles of Permanent Crimp Couplings

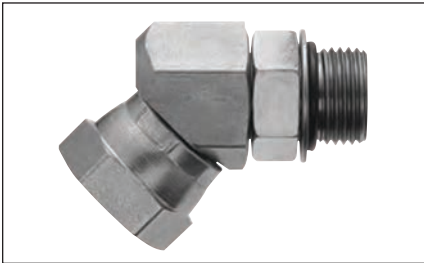

Constructed of steel and/or brass, Dayco's Adapters allow you to conveniently adapt your couplings to meet applications beyond your normal coupling stock. Adapters allow for lower inventory investments with permanent couplings.

*For a complete listing of Dayco crimping equipment refer to Dayco Hydraulic Hose and Coupling Catalog #043420B*

## Dayco® 3710 Bubble Style Hose Crimper

Part Number 200074

Designed for hand operated hose end-crimping of Beadlock couplings

This complete kit for air impact wrench operation, features the portable, light weight 3710 Dayco Bubble Style Crimper and 6 standard color coded dies in a convenient carrying case. Designed for use with the Dayco Beadlock Fitting. The Dayco 3710 Crimper delivers 100 PSIG max force for a secure OE Style triple bubble crimp on both 2 braid and reduced OD barrier hose. For BH/DBH hose only.



## Dayco® D100S Crimper

Part Number 200140

Designed to deliver 35 tons of crimping force

Strong yet lightweight top and bottom plates, an integrated handle-and base design, plus a new micrometer gauging mechanism make this Dayco portable crimper ideal for hose assembly. Dayco's D100S Crimper has four strain rods for reinforcement and added precision and durability. Color-coded die sets make correct die selection easy. This Dayco crimper can be easily customized with your choice of optional pumps, dies, and a die storage box. The D100S delivers 35 tons of force through eleven sets of optional dies to let you crimp 1 and 2 wire hose up to 1" I.D. and 4 spiral wire hose through 1" I.D.



## Dayco® D105DC Crimper

Part Number 200142 (with dies)

Designed to deliver 35 tons of crimping force

The D105DC Crimper incorporates all of the D100S features plus it has a 1 HP pump attached to avoid using hand or foot pumps. The D105DC has four strain rods for reinforcement and added precision and durability. Color coded die sets make correct die selection easy. This Dayco Crimper can be easily customized with your choice of optional die sets and die storage box. The D105DC delivers 35 tons of force through eleven sets of optional dies to let you crimp 1 and 2 wire hose and up to 1" I.D. and 4 spiral wire hose through 1" I.D.



# DAYCO® CRIMPING EQUIPMENT

## Dayco® D165DC Crimper

Part number 200230 (Includes Dies and Die Cabinet)

Designed to deliver 60 tons of crimping force



The D165 Crimper will deliver the power to quickly and easily crimp the tough fittings that most small crimpers are unable to handle. The fully adjustable micrometer style crimp adjustment accommodates a wide range of hose and fittings without the need for special shims or spacers. The easily removable coupling stop and cylinder retraction stop permit repetitive crimps to be made quickly and easily. This workhorse crimper will handle up to 1-1/4" 4 wire hose, and up to 1" 6 wire hose with standard die sets.

## Dayco® D206DC Crimper

Part Number 200150 (without dies)

Part Number 200151 (with dies and cabinet)

Designed for crimping of many hydraulic applications



The D206DC Crimper is designed for crimping a wide range of hose and coupling styles and is the most versatile machine we offer. A real workhorse with 80 tons of crimping force, the Dayco D206DC Crimper comes with 7 sets of crimp dies that allow the capability of crimping 1 and 2 wire braid and 4 spiral wire hose through and including the 1 1/4" ID sizes. Optional dies can provide increased coverage to include 1 1/2" and 2" ID 4 and 6 spiral wire hose. Color coding the dies saves time and helps prevent mistakes. The addition of a standard crimp coupling stop makes it easier to set crimp lengths for normal crimping. This sturdy machine has 4 strain rods to increase crimping precision, a micrometer gauge with limit switch for greater crimping accuracy, a simplified controller design, featuring a built in circuit breaker and emergency stop switch. Standard features include a coupling stop, pusher retraction stop, seven standard color coded die sets and

built in hydraulic pump.

## Dayco® CC4-50 Crimper

Part Number 200119

Designed to deliver 340 tons of crimping force



The CC4-50 Crimper incorporates all the features of the D206DC Crimper, plus it offers the increased capacity to crimp up to 2" on 2 braid, 4 and 6 spiral wire hose using the optional die sets. The CC4-50 delivers 340 tons of force through ten (10) optional die sets. This is the ideal crimper for repeated crimps of large quantities. The Act-1 digital crimp control center eliminates the need for crimp specs and can store your settings for easy call up on future crimps. This machine can handle it all!

## Garage Exhaust Hose And Accessories

Exhaust Systems: In service stations, garages or car dealerships which have overhead or under floor exhaust systems, the entire system (blower, primary and intermediate ductwork, etc.) should be checked periodically to ensure that the system conforms to OSHA specifications. Of particular concern in under-floor systems will be the prevention of clogging of the ductwork (with rags, water, or other foreign material.) The system will be expected to maintain an environmental reading in the shop of LESS than 55 parts per million of carbon monoxide or other noxious emittants.

### Suggestions to Prolong Hose Life

Heat Resistance: With catalytic converter equipped cars which produce heat (up to 600°F) at the tailpipe, attention should be paid to the following:

1. *Always use the proper tailpipe adapter.* It is not advisable to put hose directly over the tailpipe. This will significantly decrease the service life of the hose. Select adapters which will have an opening at least 1 1/2 times the O.D. of the tailpipe to allow for the influx of cooler, room temperature air. 64030 = 3" I.D. 64035 = 3 1/2" 64048 = oval-shaped for oval pipes and twin VW pipes 2" x 5" opening.
2. *Select the proper size of hose.* OSHA recommendations call for a minimum of 3" I.D. hose. The larger the hose, the greater the flow capability of the system. This is important because when the fumes attain the high heat characteristic of today's vehicles, these fumes have to be evacuated through a line which offers the least friction loss or static pressure (resistance). 2 1/2" I.D. hose can be used where the exhaust system is exceptionally efficient and the blower is sized to overcome the increased resistance.

### APPLICATION SIZE DATA

I.D.	TYPE
2"	Motorcycles
2 1/2"	Small Passenger Cars
3"	Regular Passenger Cars
3 1/2"	Light Trucks
4"	Gasoline Trucks
5"	Diesel Trucks

## Dayco® Flare-Vent® Hose

Designed to connect the vehicle's exhaust pipe to a central exhaust system or a garage door vent

Dayco's Flare-Vent Hose features an accordion-type design for added flexibility, and a flared end for connecting one length to another, no separate connectors are required.




Part No.	I.D.	Length	Part No.	I.D.	Length
63520	2"	11'	63535	3 1/2"	11'
63525	2 1/2"	11'	63540	4"	11'
63530	3"	11'			

## Dayco® Super-Vent® Hose

Designed for overhead exhaust systems where a tight bend radius is required

Dayco's Super-Vent Hose features an accordion type construction which enables it to make turns with a small bend radius. It's available in either 4" or 5" I.D.

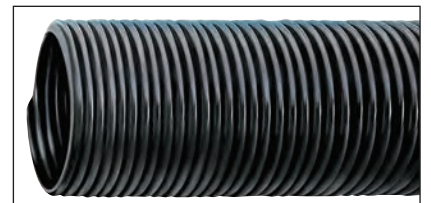

Part No.	I.D.	Extended Length
63640	4"	20'
63650	5"	12'

# DAYCO® GARAGE EXHAUST HOSE

## Dayco® Tailpipe Adapters

Designed to interface between an auto or truck tailpipe or diesel truck stack and the garage exhaust hose itself

A variety of shapes and sizes is available to enable an exact match for virtually every application need. The adapters feature a "universal" design that will mate with the appropriate connectors. The special construction is made to withstand the high tailpipe temperatures of modern vehicles.

Dayco®  
Universal Truck Stack  
Adapter



*Part Number 64060*  
Use with any 4" or 5" hose. Use with Diesel stack up to 5 1/2" O.D. Center bar keeps adapter from slipping down (6" I.D. opening). Screws over 4" or into 5" hose.

*Part Number 64066*  
Threads into 6" I.D. hose.

Dayco®  
Universal Straight  
Adapter



*Part Number 64025*  
Use with tailpipes 1 1/2" O.D. to 2" O.D.

*Part Number 64030*  
Use with tailpipes 2" O.D. to 2 1/2" O.D.

*Part Number 64035*  
Use with tailpipes 2 1/2" O.D. to 3" O.D.

Dayco®  
Universal Bell-Shaped  
Adapter



*Part Number 64125*  
Use with 2 1/2" and 3 1/2" hose. Screws over 2 1/2" or into 3 1/2" hose.

*Part Number 64130*  
Use with 2" and 3" hose. Screws over 2" or into 3" hose.

Dayco®  
Universal Oval  
Adapter



*Part Number 64048*  
Use with 3" or 4" flare vent hose. For use on twin tailpipes and oval tailpipes. Screws over 3" or into 4" hose. 2 1/2" x 6" oval.

Dayco®  
Universal Straight Truck  
Adapter



*Part Number 64140*  
Use with tailpipe adapter for gasoline trucks (4" I.D. opening). Threads over 3 1/2" or into 4" hose.

## Dayco® Y-Connectors

Designed for the merging of two hoses into one typically used with dual exhaust vehicles



*Part Number 64220*  
Use with 2" hose

*Part Number 64225*  
Use with 2 1/2" hose

*Part Number 64230*  
Use with 3" hose

*Part Number 64240\**  
Use with 4" hose

\*Aluminum Connector

## Dayco® Door Port Fittings

Designed for service station and garage doors



*Part Number 64425*  
Use with 2 1/2" hose

*Part Number 64430*  
Use with 3" hose

*Part Number 64440*  
Use with 4" hose

## Dayco® Splice Connectors

Designed for joining multiple lengths of exhaust hose



*External Connector*

*Part Number 64520*  
Use with 2" hose

*Part Number 64525*  
Use with 2 1/2" hose

*Part Number 64530*  
Use with 3" hose

*Part Number 64540*  
Use with 4" hose

## Dayco® Internal Connector

Designed to be used with overhead systems



*Part Number 64640*  
Use with 4" hose

*Part Number 64650*  
Use with 5" hose

# DAYCO® SPLASH PROTECTORS

## Dayco® NoSlack® Splash Protectors

Designed to reduce road hazards




Dayco No Slack Splash Protectors are made of rugged neoprene rubber stock loaded with polyester and cotton fiber reinforcement to deliver long service life and performance. Resistant to heat, oil and cold weather these splash protectors have the weight and stiffness required to withstand cracking and tearing.

Part No.	Dimensions
20024	24" x 24"
20030	24" x 30"
20036	24" x 36"

## Dayco® Wallboard Merchandiser

Part Number 93899 (Wallboard Merchandiser *without* product)

The most popular inventory and display system for Dayco V-Belts, Flex Hose, Curved Hose and Straight Radiator Hose. Includes 10 boards and 80 wallboard hooks.

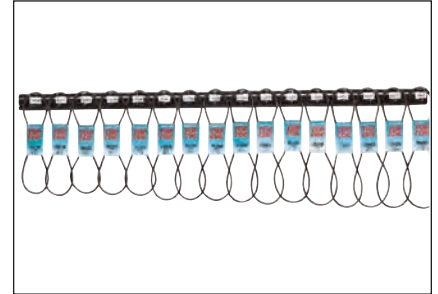

## Dayco® Finger Rack Merchandiser

Part Number 93900

The Dayco Finger Rack Merchandiser is essential when space is at a premium. Each rack is 4 ft. long and will accommodate 55 belts. There are four nail holes for easy mounting on the wall. When hanging the belt on the rack (sideways), pull the belt down through the sleeve. The sleeve will remain on the hook, which will enable the user to re-order belts for stock.



## Dayco® Tensioner & Pulley Cabinet

Part Number 99110

Designed to hold 6 Dayco No Slack Automatic Belt Tensioners and 6 Dayco No Slack Idler / Tensioner Pulleys. This 22 gauge steel cabinet measures only 12 1/2" high x 21" wide x 9" deep. Convenient built-in keyholes in the back of the cabinet allows for easy wall hanging. If preferred, this sturdy unit is also ideally suited for counter or work bench use. Multiple cabinets may be stacked on top of each other and secured by bolts through pre-drilled top and bottom cabinet holes.






## Dayco® Hose Clamp Merchandiser

Part Number 99051

Part Number 99056 (Hose Clamp Display Merchandiser *without* product)

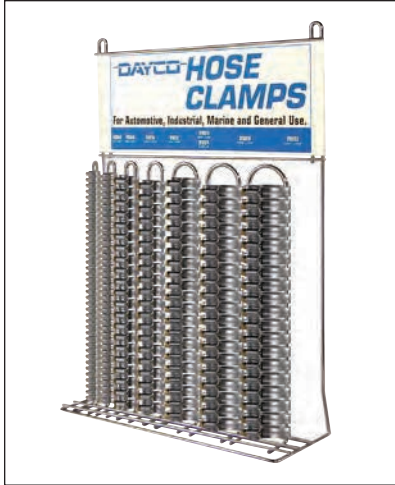

This Display Merchandiser provides an easy method to organize and sell the most popular hose clamps for both jobbers and dealers. This display can be purchased separately or can be shipped with 200 clamps, featuring 8 of the most popular sizes.

Part No. Qty.

91004	40
91006	40
91010	30
91012	30
91020	10
91024	10
91028	20
91032	20

## Dayco® Heater Hose Merchandiser Stand And 6-Spool Cabinet With Product

Part Number 99103



Dayco's Heater Hose Merchandiser Stand featuring heavy duty steel racks (22 3/4" wide x 51 1/2" high x 19 1/2" deep) holds 6 spools of Dayco hose and tubing and 3 cartons of Dayco heater hose. Included is a 12" measurement guide for tubing and a 36" guide for measuring heater hose. *Merchandiser shipped with 1 each of the following Dayco tubing and hose.*

Part No.	I.D.	Length	Part No.	I.D.	Length
80057	1/4"	25'	80207	7/32"	50'
80060	5/16"	25'	80312	1/2"	50'
80063	3/8"	25'	80314	5/8"	50'
80205	7/64"	50'	80316	3/4"	50'
80206	5/32"	50'			

## Dayco® Heater Hose Merchandiser Stand And 9-Spool Cabinet with Product

Part Number 99104

The Dayco Heater Hose Merchandiser Stand with heavy duty steel racks (22 3/4" wide x 53 high x 21" deep) is designed to hold 9 spools of Dayco hose and tubing and 3 cartons of Dayco heater hose. Included is a 12" measurement guide for tubing and a 36" guide for measuring heater hose. *Merchandiser shipped with 1 each of the following Dayco tubing and hose.*

Part No.	I.D.	Length	Part No.	I.D.	Length
80057	1/4"	25'	80205	7/64"	50'
80060	5/16"	25'	80206	5/32"	50'
80063	3/8"	25'	80207	7/32"	50'
80088	1/4"	25'	80312	1/2 "	50'
80089	5/16"	25'	80314	5/8"	50'
80090	3/8"	25'	80316	3/4"	50'



## Dayco® Heater Hose Merchandiser Stand With Product

Part Number 99100

Part Number 99080 (Merchandiser Stand *without* product)

Only 22 3/4" wide x 39 1/2" high x 19 1/2" deep this rugged steel Dayco Heater Hose Merchandiser Stand holds 3 cartons of Dayco heater hose. Included is a 36" guide for measuring heater hose.

*Merchandiser shipped with 1 each of the following hose.*

Part No.	I.D.	Length
80312	1/2"	50'
80314	5/8"	50'
80316	3/4"	50'



## Dayco® 6-Spool Windshield Washer Vacuum Tubing And Fuel Line Hose Merchandiser Cabinet with Product

Part Number 99101

Part Number 99081 (Merchandiser Cabinet *without* product)



Designed to hold 6 Dayco spools of hose the Dayco Windshield Washer Vacuum Tubing and Fuel Line Hose Merchandiser measures 22 3/4" wide x 12" high x 19 1/2" deep for convenient mounting on Dayco's Heater Hose Merchandiser Rack or counter. Includes a 12" guide for easy measuring. *Merchandiser shipped with 1 each of the following:*

Part No.	I.D.	Length	Part No.	I.D.	Length
80057	1/4"	25'	80205	7/64"	50'
80060	5/16"	25'	80206	5/32"	50'
80063	3/8"	25'	80207	7/32"	50'

## Dayco® 9-Spool Windshield Washer Vacuum Tubing And Fuel Line Hose Merchandiser Cabinet with Product

Part Number 99102

Part Number 99083 (Merchandiser Cabinet *without* product)




Fabricated from heavy duty steel (22 3/4" wide x 14" high x 21" deep) this Dayco Merchandiser holds 9 spools of Dayco hose. Includes a 12" measurement guide for easy use. For maximum utility this unit can be mounted on the Dayco Heater Hose Rack or on counter. *Merchandiser shipped with 9 spools each of the following hose.*

Part No.	I.D.	Length	Part No.	I.D.	Length
80057	1/4"	25'	80090	3/8"	25'
80060	5/16"	25'	80205	7/64"	50'
80063	3/8"	25'	80206	5/32"	50'
80088	1/4"	25'	80207	7/32"	50'
80089	5/16"	25'			

## Dayco® Fuel Line And Vacuum Hose Rack

Part Number 99107 (Hose Rack *without* product)

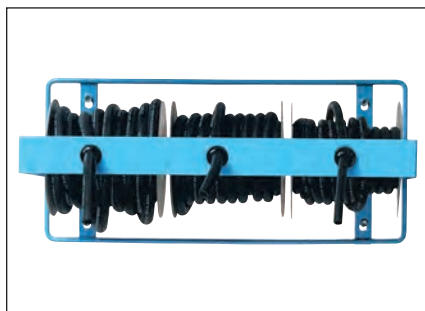


The Dayco Fuel Line and Vacuum Hose Rack has been designed to fit the individual needs of the installer or retail outlet. It holds up to 3 reels of hose that can be easily mounted on a wall or attached to the Dayco Merchandiser Stand (part no. 99109). Reels of hose are immediately accessible and visible, allowing for quick dispensing and inventory maintenance. The Dayco Fuel Line and Vacuum Hose Rack measures 9 1/2" high x 21" wide x 9" deep and has a durable Dayco blue powder coat finish. All hardware necessary for assembly and mounting is included.

## Dayco® Heater Hose Rack

Part Number 99108 (Hose Rack *without* product)

Featuring a unique locking hinge, this Heater Hose Rack insures easy loading and secure carton support. Mounted either on a wall or as part of the Dayco Merchandise Stand (part no. 99109), this Heater Hose Rack allows for the vertical storage and easy dispensing of heater hose. The Dayco Heater Hose Rack measures 19 1/2" high x 17 1/2" wide x 5 1/2" deep and has a durable Dayco blue powder coat finish. All hardware needed for assembly and mounting is included.

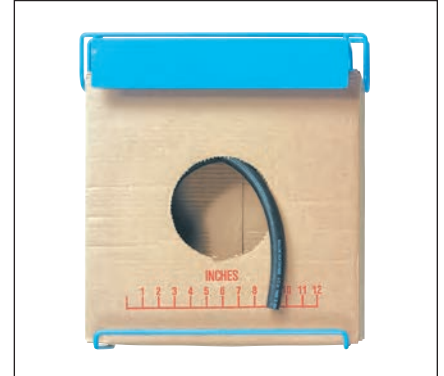

## Dayco® Merchandiser Stand

Part Number 99109 (Merchandiser Stand *without* Racks or product)

This distinctive, extremely sturdy Hose Merchandiser Stand is designed to accommodate a combination of (4) Fuel Line and Vacuum Hose Racks (part no. 99107) containing up to 12 reels of Fuel Line and Vacuum Hose and (3) Heater Hose Racks (part no. 99108), each accepting a 50' carton of Heater Hose. Requiring a minimum amount of floor space, this stand measures 68" high x 17" wide x 24" deep and is readily "at home" in a repair bay or store operation. The Dayco Merchandiser Stand has a durable Dayco blue powder coat finish and includes all hardware needed for assembly.



## Dayco® 6-Drawer Hydraulics Cabinet

Part Number 201890

Measuring only 41 1/8" wide x 12 1/2" deep x 30 5/8" high, this Dayco 6-Drawer Hydraulics Cabinet maximizes your work space efficiency. The cabinet's drawers are mounted on roller bearing slides for smooth, reliable operation and fully extend to provide total and easy access. Included are 40 3 1/2" wide bins and 10 7" wide bins designed with removable dividers to permit inventory adjustment. Options include stationary leg sets, caster legs, additional bins and plastic inserts.



Part No. 201891  
3 1/2" Wide Plastic Bins (Box of 10)

Part No. 201892  
7" Wide Plastic Bins (Box of 5)

Part No. 201893  
Plastic Inserts for Plastic Bins  
(Package of 50 Small Inserts)

Part No. 201893A  
Plastic Inserts for Plastic Bins  
(Package of 50 Large Inserts)

Part No. 201897  
Heavy Duty Stationary/Caster Leg  
Set (Holds up to 750 lbs.)

## Dayco® Hydraulic Hose Reel Stand

Part Number 201988

Designed for use in storing reels of hydraulic hose



This unique reel stand designed for easy set up and access allows for the storing and dispensing up to 5 reels of hose. The display stands approximately 51" high, 40" wide and 30" deep.

## Dayco® Hydraulic Crimper Stand

Part number 200185

Designed to hold the D206 crimper



This stand will give you the safety of a secure stand with versatility of casters to allow you to safely and easily move your crimper set up anywhere at your location. Dayco's D206 crimper can be easily mounted on top of this stand using four attachment bolts. With the available bottom shelf, this stand is ideal for utilizing Dayco's Die Storage Cabinets to create an easy access hydraulic set up that is convenient and practical.

## Dayco® Hydraulic O-Ring Kit

Part Number 201964

Designed for storing & quick access to commonly used O-rings

Dayco's convenient Hydraulic O-Ring Kit comes pre-packaged with 180 Nitrile O-Rings representing 18 of the most popular sizes for the following applications:

- PA and PH O-ring Flange Ends (Code 61 and Code 62)
- Straight Thread Boss Couplings and Adapters
- O-Ring Face Seal "Titan" Male Ends
- Komatsu-10PK Flange Ends.

Options: Extra compartments for up to 6 additional O-Ring sizes.  
Individual O-Ring packages sold as packages of 10.



Straight Thread Boss O-Ring		Flange O-Ring		Face Seal O-Ring	
Part No.	Flange Part Dash Size	Part No.	Flange Part Dash Size	Part No.	Thread Size
124338	4	124304	10	124311	9/16-18
124339	5	124305	8	124312	11/16-16
124340	6	124306	12	124313	13/16-16
124341	8	124307	16	124314	1-14
124342	10	124308	20	124315	1 3/16-12
124343	12	124309	24	124316	1 7/16-12
124344	14	124310	32	124317	1 11/16-12
124345	16			124318	2-12
124346	20				

## Dayco® Fuel Line And Vacuum Tubing Connector Kit

Part Number 99105

This sturdy, plastic kit provides a convenient storage display unit for fuel line and vacuum tubing connectors. The cover is labeled to identify the connectors stocked in each compartment.

Each kit contains 2 each of the following part numbers:

Part No.	Size	Style	Part No.	Size	Style
80600	3/32"	Y	80622	5/32"	Elbow
80601	1/8"	Y	80623	3/16"	Elbow
80603	3/16"	Y	80630	3/32"	Tee
80610	3/32"	Straight	80631	1/8"	Tee
80611	1/8"	Straight	80632	5/32"	Tee
80612	5/32"	Straight	80633	3/16"	Tee
80613	3/16"	Straight	80640	1/8" - 3/32"	Reducer
80620	3/32"	Elbow	80642	5/32" - 1/8"	Reducer
80621	1/8"	Elbow	80643	1/4" - 3/16"	Reducer



## Dayco® Heater Hose Connector Kit

Part Number 99106



This sturdy, plastic unit provides a functional method of displaying or storing an assortment of heater hose connectors. The unit opens from both sides to provide multiple storage compartments. Each cover is labeled to identify the connectors stored in each compartment.

Each kit contains 2 each of the following part numbers:

Part No.	Size	Style	Part No.	Size	Style
80650	1/4"	Straight	80671	3/8"	Elbow
80651	3/8"	Straight	80672	1/2"	Elbow
80652	1/2"	Straight	80673	5/8"	Elbow
80653	5/8"	Straight	80674	3/4"	Elbow
80654	3/4"	Straight	80680	1/4"	Tee
80660	1/2" > 3/8"	Reducer	80681	3/8"	Tee
80661	5/8" > 1/2"	Reducer	80682	1/2"	Tee
80662	3/4" > 5/8"	Reducer	80683	5/8"	Tee
80670	1/4"	Elbow	80684	3/4"	Tee

## Dayco® Belt Tension Gauges

Kriket Pocket Gauge for V-Belts... Part Number 93865

Kriket II Pocket Gauge for Ribbed Belts... Part Number 93866

Improperly tensioned belts cause slippage, squealing, heat build-up and premature failure. Dayco engineers recommend careful belt tensioning. After a new belt has been installed, run engine for 3 to 5 minutes to seat belt. After seating belt, reset tension to amount recommended in the RETENSION AMOUNT column of the Belt Tension Table shown below.



## Dayco® Belt Diagnostic Kit

Kriket Pocket Gauge for V-Belts... Part Number 93865

Kriket II Pocket Gauge for Ribbed Belts... Part Number 93866

Designed to diagnose misalignment, tension and wear with a belt drive system

The #1 complaint with belts today is noise and the #1 cause for belt noise is misalignment. The new Dayco Belt Diagnostic Kit has all the tools to properly identify misalignment, belt tension and worn multi-rib belts. Kit includes: Belt tension gauge, two piece laser alignment tool, belt wear gauges, tension chart, replacement battery and battery installation wrench.





# DAYCO® BELT AND HOSE INSTALLATION TOOLS

## Dayco® Factfinder® Gauge II

Part Number 93859

Measures belts up to 100"



Find the exact Dayco replacement belt instantly. A quick check shows the top width and length/part number of the corresponding Dayco FHP Utility V-Belt or GPL Premium Utility Belt, Industrial A and B Belts, plus 3VX and 5VX Dayco Gold Label® Cogged Belt

## Dayco® Factfinder® Gauge III

Part Number 93860

Measures v-belts up to 100" and multi-ribbed belts up to 115"



front view



back view

The Dayco Factfinder Gauge III measures all multi-ribbed belts (competitive or OEM) up 115" in effective length and indicates the corresponding Dayco replacement belt size. The Dayco Factfinder Gauge III measures v-belts up to 28/32" top width and 100" effective length.

## Dayco® Factfinder® Gauge III Extension

Part Number 93863

Permits v-belt measurement up to 130" and multi-ribbed belt measurements up to 145"




This lightweight extension easily attaches to the Dayco Factfinder Gauge III for accurate measurement of larger sized v-belts and multi-ribbed belts and quick identification of corresponding Dayco replacement sizes.

## Dayco® Factfinder® Gauge III Brackets

Part Number 93861


These “holding” brackets allow the Dayco Factfinder Gauge III to be mounted on a wall, counter or convenient location of your choice permitting both hands to be free for the accurate measuring and easy size verification of conventional v-belts or multi-rib belts.

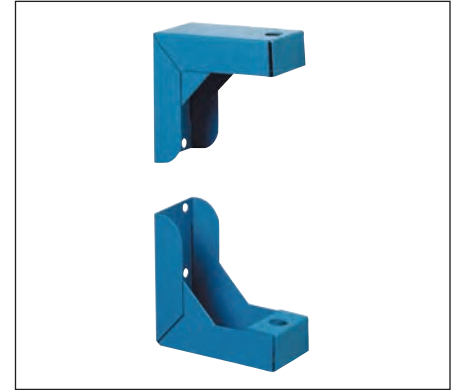

## Dayco® Serpentine Belt And Automatic Tensioner Removal Tool

Part Number 93867

The Dayco Serpentine Belt and Automatic Tensioner Removal Tool features an extra long handle for the leverage and clearance needed to release the tensioner's spring pressure prior to the removal and installation of a belt or tensioner. Complete with four sizes of shallow sockets, this tool allows for the servicing of a variety of vehicles.

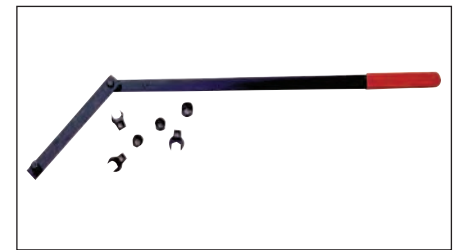

## Dayco® **AWEARNESS**® Gauge

Part Number 000000


By simply placing the notched area lengthwise over the ribbed section of the belt, this pocket size device quickly and easily identifies the potential of serpentine belt failure. If there are more than 4 cracks per inch in the belt, trade practice recommends the belt be replaced.



## Dayco® Belt Installation Tool

Part Number 93871

This time saving tool gives the technician the control and extended reach necessary when installing serpentine belts. The tool has also been designed to help install V-belt and timing belts that are located in hard-to-access areas. The two-pin design provides convenient belt push/pull capability while the handle gives the technician the twisting control required to install belts in confined or restricted areas.

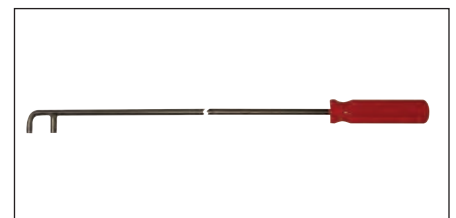

# DAYCO® BELT AND HOSE INSTALLATION TOOLS

## Dayco® Timing Belt Cam Tool

Part Number 93873

Designed for locking timing belt gears during service




To retain engine timing position during timing belt removal and installation, twin camshafts must be locked on their timing marks. The Dayco Timing Belt Cam Tool's adjustable arms fit into the gear's teeth and expand to securely hold in place gear sizes from 4" to 6" (101mm to 152mm) with gear separation up to 3" (76mm).

## Dayco® Telescopic Retrieval Pole

Part Number 93868

Part Number 93870 (replacement hook)

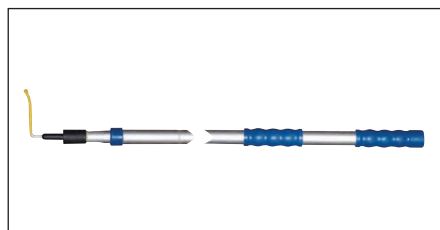

This sturdy aluminum telescoping pole extends from 52" to 94 1/4" providing that "extra reach" for retrieving belts or hoses from wall boards or finger racks. When extended to the desired length, the poles' unique twist and lock feature prevents the pole from unexpectedly retracting. **Note: NOT recommended for uses other than belt and hose retrieval.**

## Dayco® Hose And Tubing Cutter

Part Number 93847

Part Number 93848 (replacement blades)



Dayco's Hose and Tubing Cutter handles non-reinforced and textile reinforced rubber hose and tubing through 2" I.D. A replaceable hardened stainless steel blade allows for a clear cut with no burrs or residue. Featuring a safe to use tough glass filled nylon handle with attached ring, this cutter also allows for ease of carrying or for attaching to the Dayco Hose Display Merchandiser.

## Dayco® Tensioner Retainer Pin Set

Part Number 93872

Designed for installation and maintenance of timing belt tensioners



To safely retain the hydraulic pin of a timing belt tensioner in a compressed state during servicing, Dayco recommends the use of this handy Tensioner Retainer Pin Set. Consisting of 6 different sized spring hardened steel pins, the set accommodates a wide variety of timing belt tensioners...including certain serpentine belt applications.



